

## Feature

- Modular triangular linear lighting offer infinite possibilities.
- High quality, energy-efficient LED Lighting for environmental protection.
- The power supply is built-in and the wiring is of the PUSH-IN shrapnel type. It is easy to install, disassemble, and maintain.
- For offices, conference rooms, supermarkets, home lighting, airports, museums, libraries, corridors, cinemas, hotels, etc.



Modular



DIY Splicing



Customizability



Easy Maintenance




Scalability



Flexibility




Shrapnel-type Wiring



## Luminaire parameters

Model	HL-PB5075A-B06
Size	600*426*426mm
Nominal Power	40W
Lm	6000lm±10%(@4000K)
Beam Angle	110°-120°
Input Voltage	AC100-277V
CCT	2700-6500K
CRI	>80
Protection Grade	IP20
Certification	CE、ROHS、UL
Warranty	3 years

Units:mm

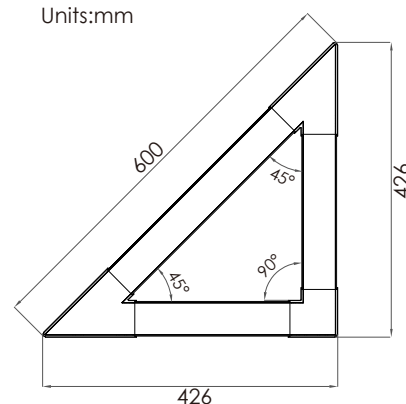

## Installation Accessories



module1 (45°)



module2 (90°)



module3



Accessory


## Installation

### Step 1: Assembly product


Please assemble the modules corresponding to the correct angles.




①

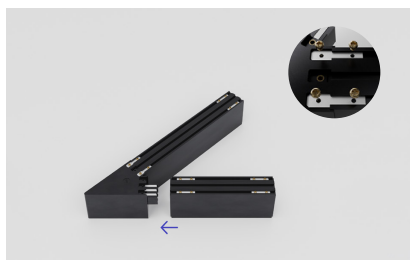


②

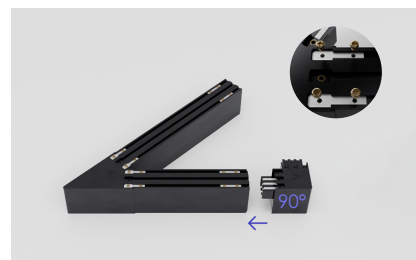


③

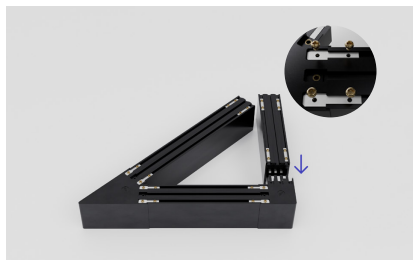

④

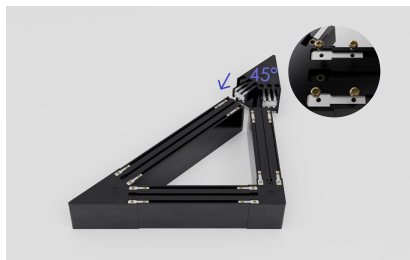


⑤

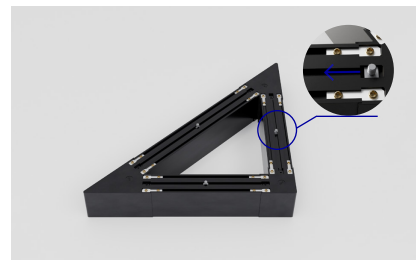


⑥

### Step 2: Install


Please make sure that the place of installation could stand 10 times the weight of itself before installing in a place where is no vibration, no swing, and no fire risk.




-- Use an electric drill to make holes in the appropriate locations on the wooden board or cement wall.




-- Secure the rubber plug in the hole; Use M4\*25 screws to secure the bracket to the rubber plugs.

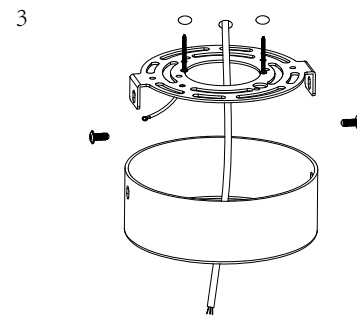


-- Use M4\*10 screws to secure the ceiling plate to the bracket.



-- Thread the hanging rope through the locking device on the ceiling plate.




-- Attach the light fixture to the hanging rope, adjust to the desired height and position, and the installation is complete.

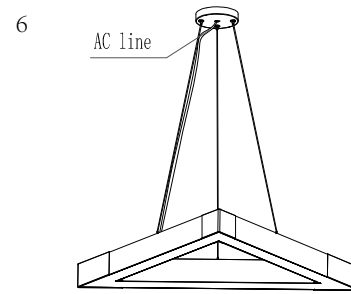

-- After installation, correctly connect the AC power line of the light fixture to the mains power supply.

## Packing

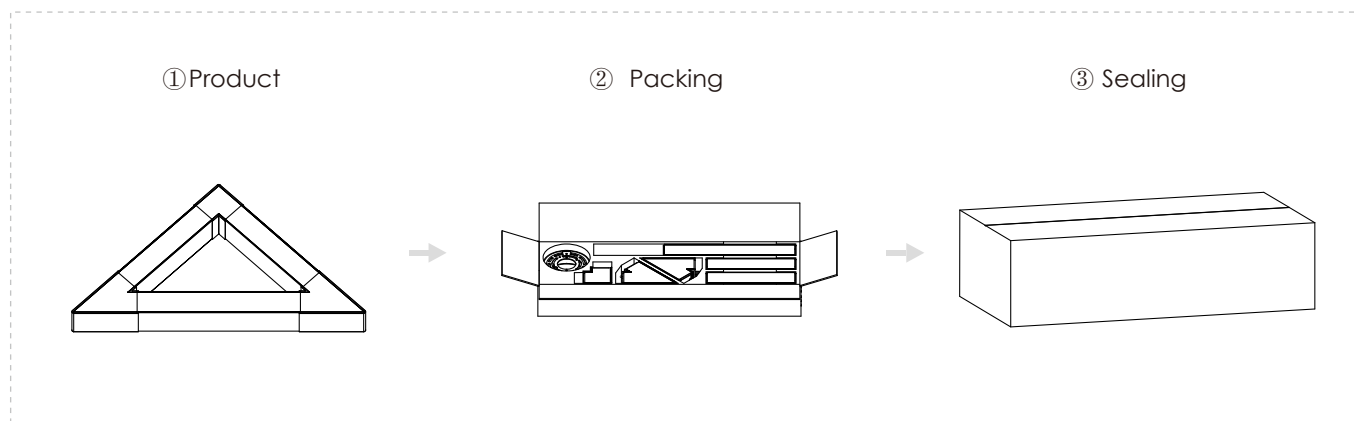

Model	HL-PB5075A-B06	Carton box	710*430*224mm
Inner box	690*205*100mm	QTY/Carton	4 PCS
NW	2.9kg/PCS	GW	3.4kg/PCS

## USER INSTRUCTIONS

- 1.The installation of the unit must be done by a qualified electrician.
- 2.The unit must be earthed in case an earth connecting point exists.
- 3.Ensure that the mains is switched off during servicing.
- 4.Ensure that after the installation,the unit is properly fixed and the cable clamps (if exist)are well tightened.
- 5.Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation.