HL-BAPL013

-Professional industrial design with sharp lines. -Imported PC /PMMA diffuser with uniform and soft lighting.

-AL6063 aluminum profile with excellent heat dissipation performance.

-Closed-fitting end cap without screw, easier installation.


(🐔 🖓 🖉 💆

I Basic Parameters

Material	AL6063+PC/PMMA
Surface	Anodized/Painting
Lighting source width	20mm
Length	4m/max
Application	Apply to office, boardroom, supermarket and home lighting, mainly application for drywall and ceiling.

Black clear






Lighting Source

(width) max 20mm


Connector

1

I Installation Accessories

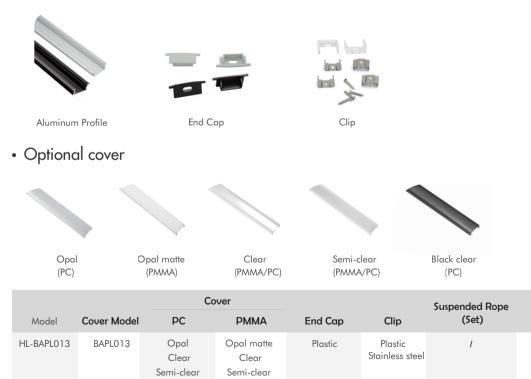

I Structure image

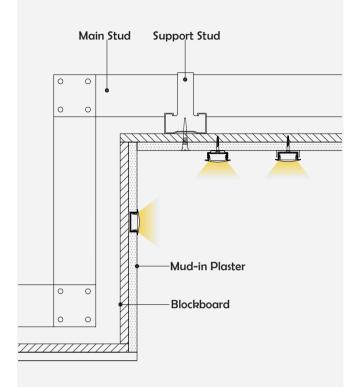

I Effect image



I Application

