


# HL-CA007-L12



## FIXTURE PARAMETERS

Dimension: L1200\*W75\*H84mm

Luminous Flux: Regular: 3800lm /  
High light effect: 4680lm  
(optionally)

Luminous Efficiency: Regular: 90lm/w /  
Emergency: 95lm/w /  
High light effect: 130lm/w  
(optionally)

Emergency: Regular / emergency (15w)

Input Voltage: AC100-240V

Beam Angle: 120°

Nominal Power: 40W

CCT: 2700-6500k


CRI: >80

Protection Grade: IP20

Certification: CE, ROHS

Warranty: 3 years

Color: ■ ■

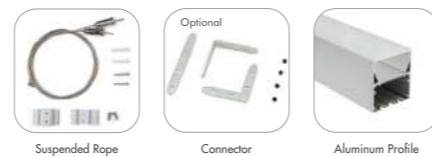

Suspended Rope

Connector

Aluminum Profile

- Professional appearance design, simple and elegant.
- High quality, energy-efficient LED Lighting for environmental protection.
- Anodized aluminum profile with good heat sink.
- Built-in power supply, no flicker.
- For offices, conference rooms, supermarkets, home lighting, etc.

