



# HL-CA008-L12



## FIXTURE PARAMETERS

Dimension: L1200\*W60\*H85mm  
Luminous Flux: 1500lm  
Emergency: Regular / emergency (15w)  
Input Voltage: AC100-240V  
Beam Angle: 120°  
Nominal Power: 20W  
CCT: 2700-6500k  
CRI: >80  
Protection Grade: IP20  
Certification: CE, ROHS  
Warranty: 3 years  
Color: ■ ■

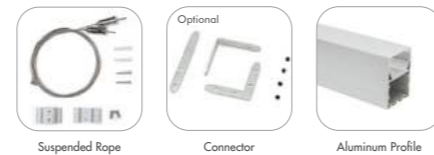

- Professional appearance design, simple and elegant.
- High quality, energy-efficient LED Lighting for environmental protection .
- Anodized aluminum profile with good heat sink.
- Built-in power supply, no flicker.
- For offices, conference rooms, supermarkets, home lighting, etc.

