


HL-CA023-L12



FIXTURE PARAMETERS

Dimension: L1200*W75*H80mm

Luminous Flux: 2800lm

Emergency: Regular / emergency (15w)

Input Voltage: AC100-240V

Beam Angle: 120°

Nominal Power: 35W

CCT: 2700-6500k

CRI: >80


Protection Grade: IP20

Certification: CE, ROHS

Warranty: 3 years

Color: ■ ■

- Professional appearance design, simple and elegant.
- High quality, energy-efficient LED Lighting for environmental protection.
- Anodized aluminum profile with good heat sink.
- Built-in power supply, no flicker.
- For offices, conference rooms, supermarkets, home lighting, etc.

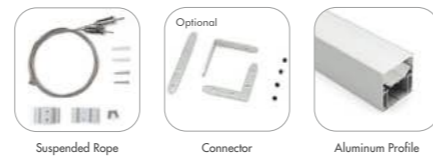

Suspended Rope

Connector

Aluminum Profile

