



Feature

- Professional appearance design, simple and elegant.
- LED 2835-0.5W single chip, low power consumption, long life, good heat dissipation, energy saving and environmental protection.
- Built-in power supply, no flicker.
- The whole lamp can be used for transverse splicing and longitudinal splicing.
- Professional square cone reflector with reflective glass Angle 60° * 70°, stylish appearance, exquisite and unique.
- Application: offices, conference rooms, supermarkets, schools, home lighting and so on.

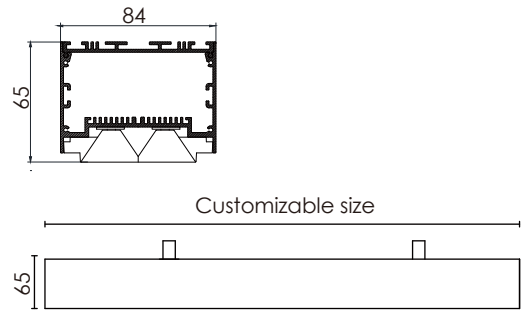

Luminaire parameters

Size	L1200*W84*H65mm
Lm	7600lm
Input Voltage	AC100-240V
Beam Angle	60°*70°
Nominal Power	65W
CCT	2700-6500k
CRI	>80
Protection Grade	IP40
Certification	CE, RoHS
Warranty	3 years

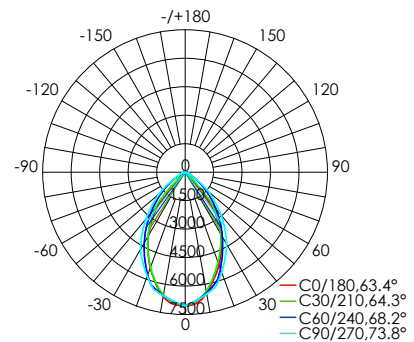

Height	Eavg,Emax	Diameter
1m	4030, 7043lx	123.59cm
2m	1008, 1761lx	247.18cm
3m	447.8, 782.5lx	370.77cm
4m	251.9, 440.2lx	494.36cm
5m	161.2, 281.7lx	617.94cm

Note: The curve is the illumination area and the average illuminance of the luminaire under different projection distances.

Installation Accessories



Suspended Rope



Connector




Local Graph




Connection mode


Installation

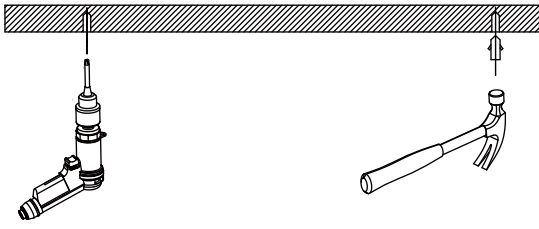


① Prepare the electric drill, hammer, stud;

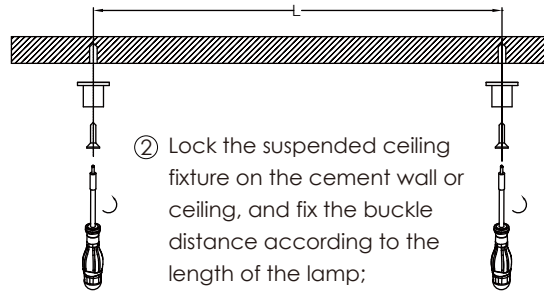

② Lock the suspended ceiling fixture on the cement wall or ceiling, and fix the buckle distance according to the length of the lamp;

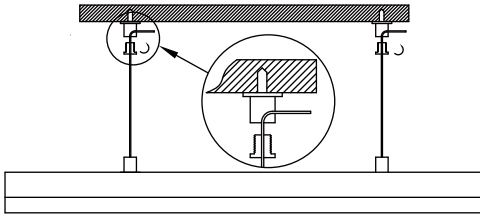


③ Lock the wire sling fixing parts, and fixed the installation length by adjust the wire sling;

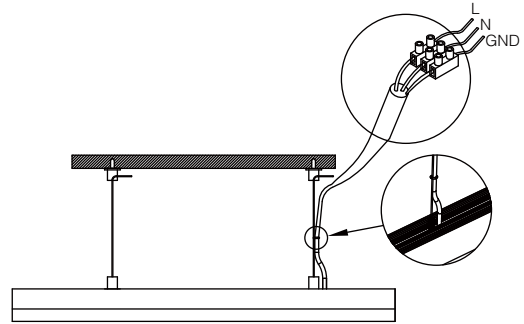


④ Connect the power supply and complete the installation.

SPLICING METHOD

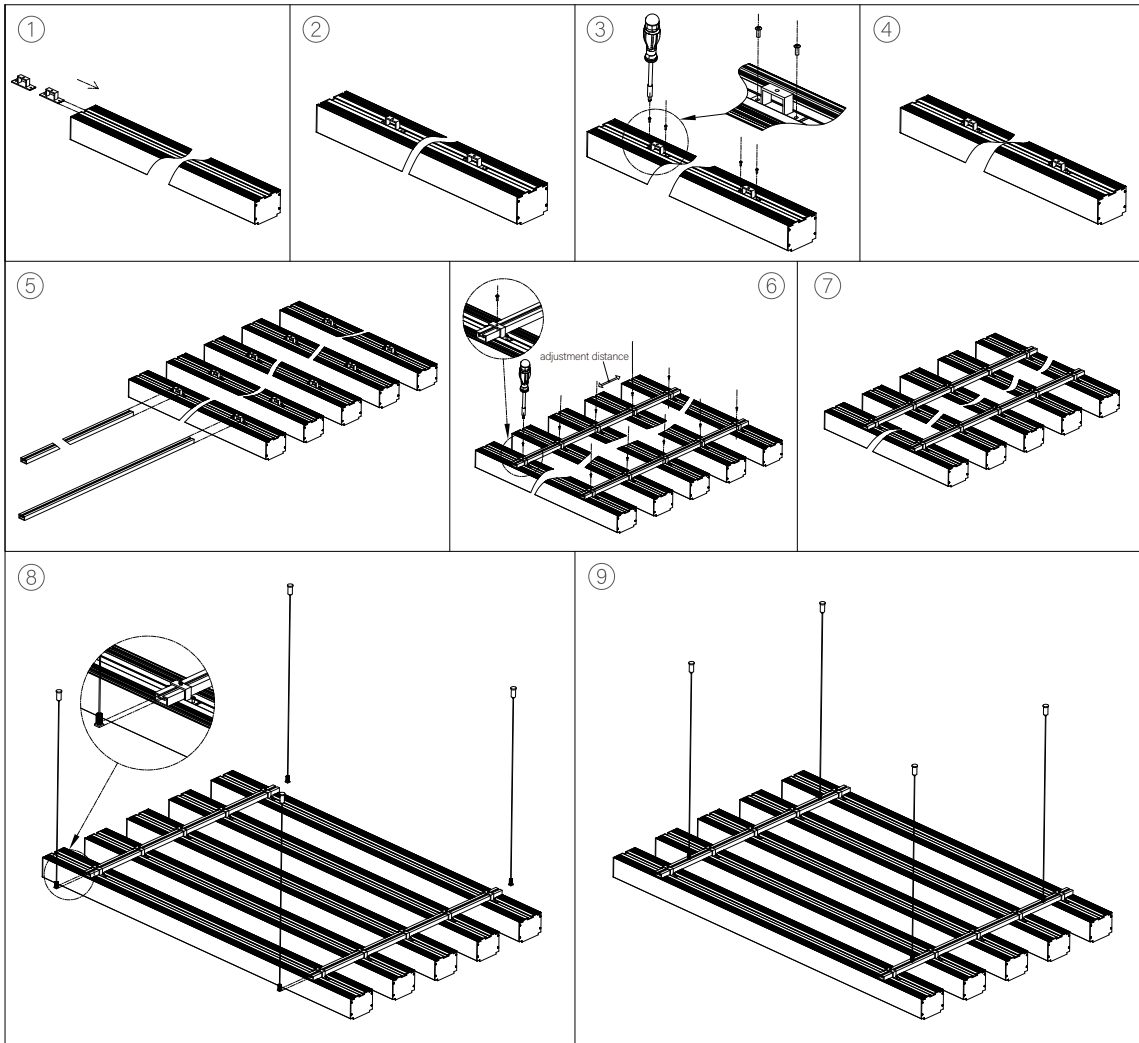

Packing

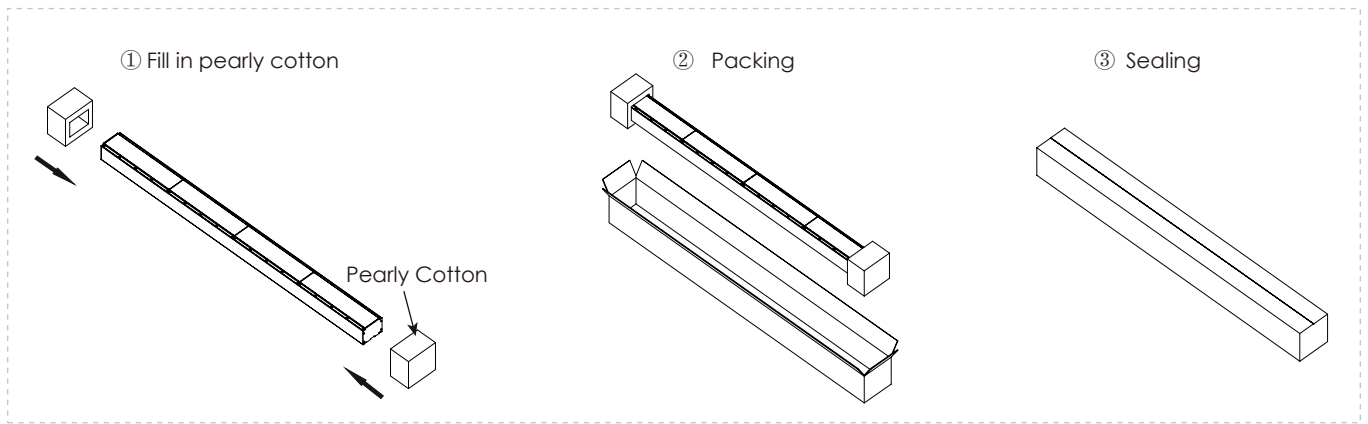

Model	HL-TA083-L12	Carton box	1231*399*271mm
Inner box	1216*128*128mm	QTY/Carton	6 PCS

Notices

- 1.The power supply must be turned off before installation.
- 2.Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3.This product is for indoor use only.
- 4.This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5.The product is not responsible for damage caused by accidental factors or improper use.