


UGR<19



Feature

- LED 2835-0.5V single light source,low power consumption, long lifetime,- good heat dissipation, energy saving and environmental protection.
- Build-in low voltage constant current power supply,safe and reliable use,no strobe phenomenon,
- Simple construction,convenient installation vertically and horizontally.
- Big size and sufficient light supply.
- Professional anti-glare prism diffuison plate,anti-glare value UGR<19,light soft and comfortable,protect eyes.
- Applications:offices,conference room,supermarkets,schools,home lighting and so on.

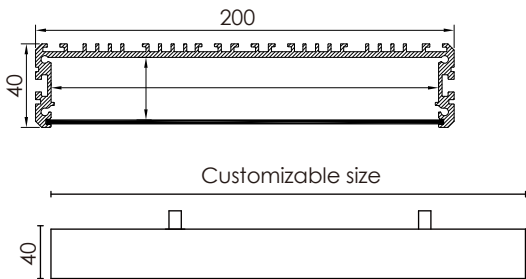

Luminaire parameters

Size	L1200*W200*H40mm
Lm	6500lm
Input Voltage	AC100-240V
Beam Angle	120°
Nominal Power	80W
CCT	2700-6500k>
CRI	80
Protection Grade	IP40
Certification	CE, Ro HS
Warranty	3 years

Installation Accessories



Suspended Rope



Connector



End cap




Aluminum Profile




Clip


Installation

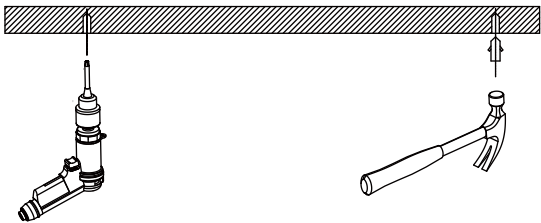

① Prepare the electric drill, hammer, stud;

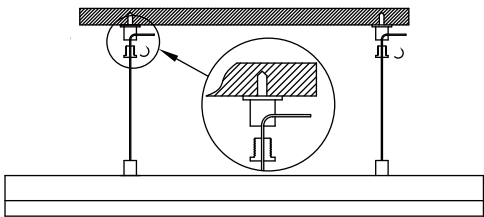



③ Lock the wire sling fixing parts, and fixed the installation length by adjust the wire sling;

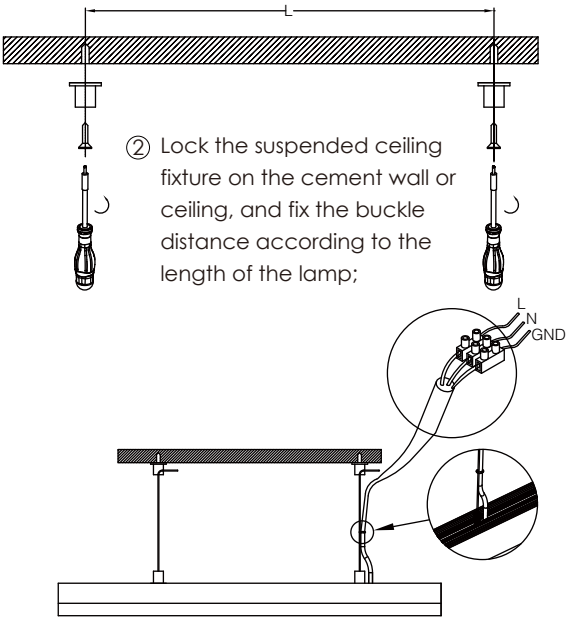


② Lock the suspended ceiling fixture on the cement wall or ceiling, and fix the buckle distance according to the length of the lamp;

④ Connect the power supply and complete the installation.

Splicing method

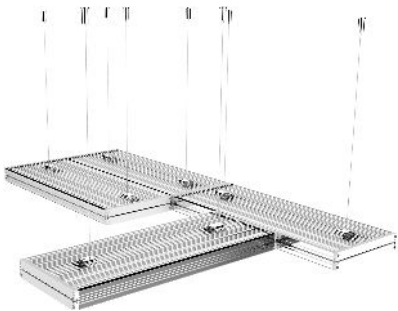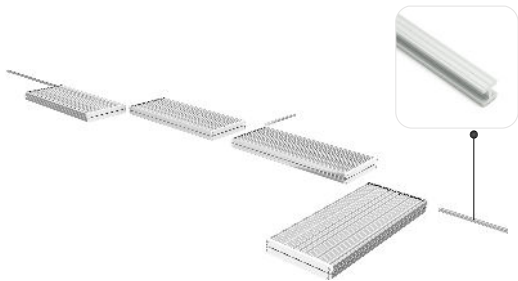

Packing

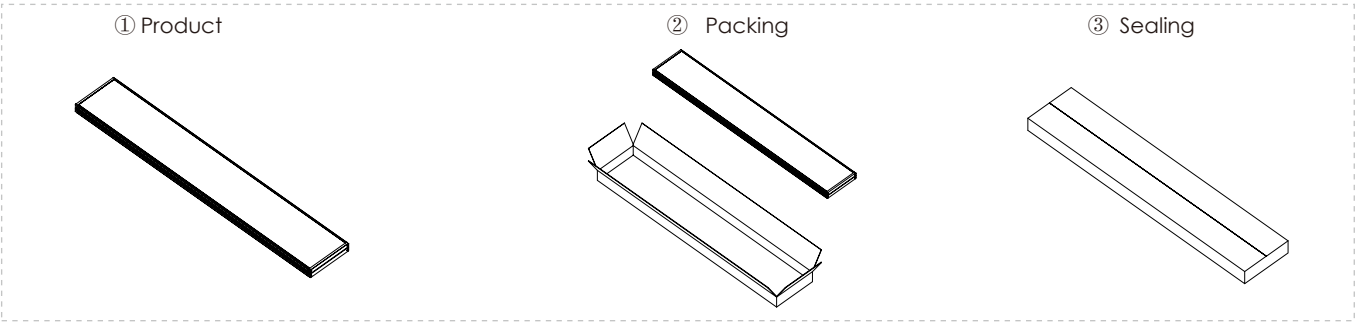

Model	HL-CA085-L12	Carton box	1265*775*155mm
Inner box	1250*250*70mm	QTY/Carton	6 PCS

Notices

- 1.The power supply must be turned off before installation.
- 2.Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3.This product is for indoor use only.
- 4.This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5.The product is not responsible for damage caused by accidental factors or improper use.