
Shenzhen Helian Electronics Co.,Ltd





Model: HL-GA046-A



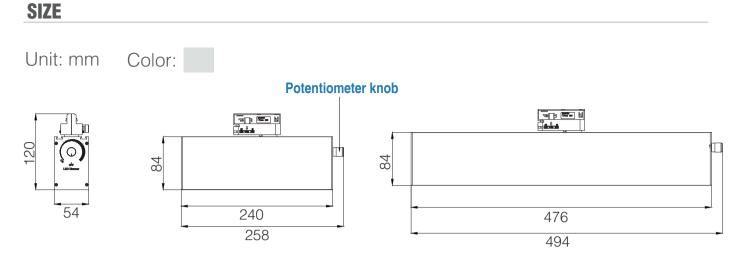

Feature

- The integrated design of lamp body and guide rail joint is adopted, and the appearance design is simple and elegant, beautiful and decent;
- Built-in 0~10V constant current dimming power supply, safe and reliable to use, smooth dimming, no flicker in the whole dimming process, dimming range 0% ~ 100%, and dimming depth is about 0.1%.
- Adopting the design structure of manual adjustable potentiometer, you can directly adjust manually and feel the original dimming off tick sound;
- Professional anti-glare grille reflector, reflective angle optional (15°/30°/45°), anti-glare value UGR<16; soft & comfortable light and protect eyes;</p>
- Adopt imported Japanese Teijin PC material cover (PC and reflector optional), high lighting transmittance, strong weather resistance, high temperature resistance, corrosion resistance, and strong impact resistance;
- The guide rail joint can be rotated 0-330° horizontally and unilaterally;

Accessories



Rail connector



Potentiometer knob 2



PC Cover






PARAMETERS


Model	HL-GA046-A-R01	HL-GA046-A-R02	HL-GA046-A-D01	HL-GA046-A-D02
Length (mm)	L258*W54*H120mm	L494*W54*H120mm	L258*W54*H120mm	L494*W54*H120mm
Cover	Five-in-one reflector	Five-in-two reflector	PC Cover	
Dimming	YES			
Rated Voltage	AC100-240V			
Nominal Power	15W	30W	15W	30W
LM	1300lm	2600lm	1450lm	2850lm
CRI	>70			
Beam Angle	15°/30°/45°		110°	
CCT	2700-6500k			
Warranty	3 years			
N.W	0.71KG	1.25KG	0.68KG	1.20KG
Working Temperature	-20~+50 °C			

INSTRUCTIONS

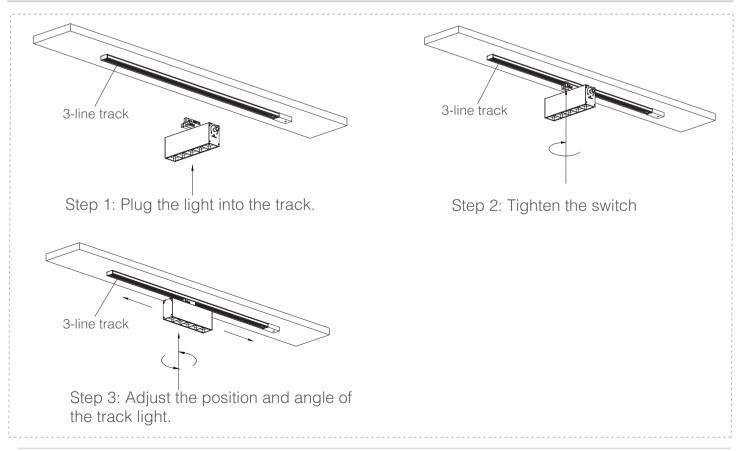


– Page 03 —

ROTATION DIAGRAM

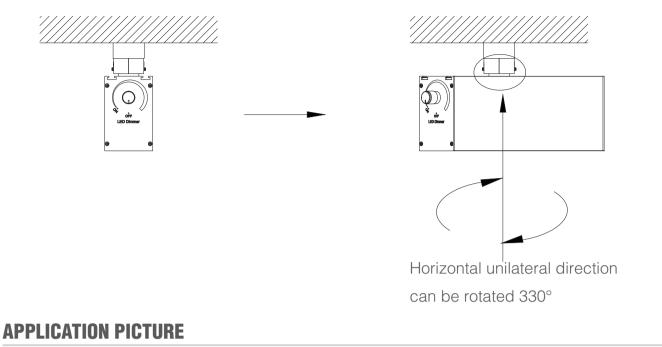



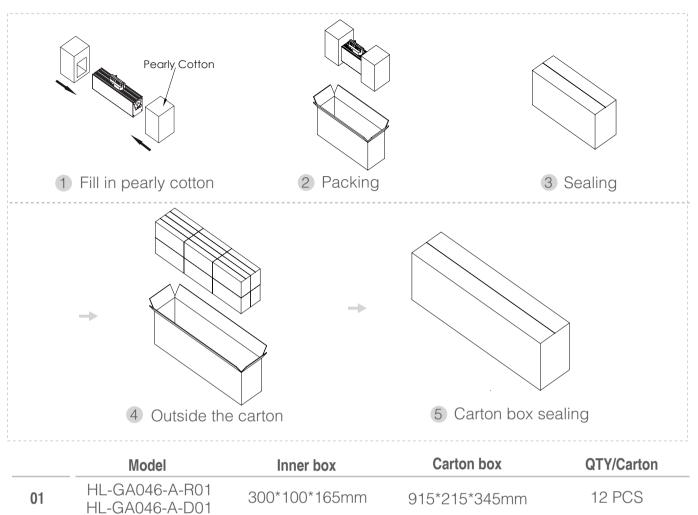

02 HL-GA046-A-R02 535*100*165mm 1085*215*345mm 8 PCS

NOTICES

- The power supply must be turned off before installation.
- Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- This product is for indoor use only.
- This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- The product is not responsible for damage caused by accidental factors or improper use.

HELIAN

Shenzhen Helian Electronics Co.,Ltd

Shenzhen Helian Electronics Co.,Ltd



