




# HL-TA046-L12

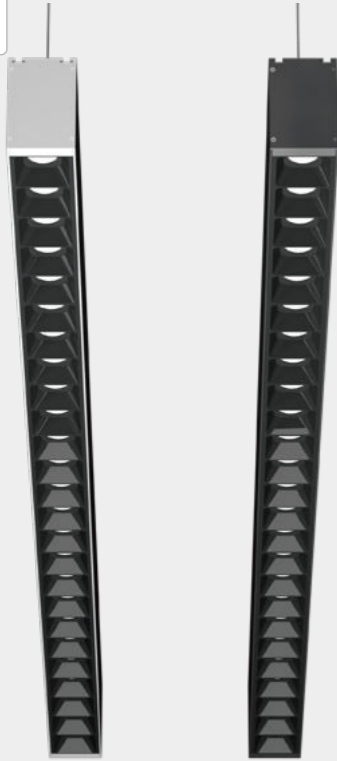

## FIXTURE PARAMETERS

Dimension: L1200\*W54\*H84mm  
Luminous Flux: (up)1100lm / (down)2400lm  
Input Voltage: AC100-240V  
Beam Angle: 15°/30°/45°  
Nominal Power: (up)15W / (down)35W  
CCT: 2700-6500k  
CRI: >80  
Protection Grade: IP40  
Certification: CE, ROHS  
Warranty: 3 years  
Color: ■ ■

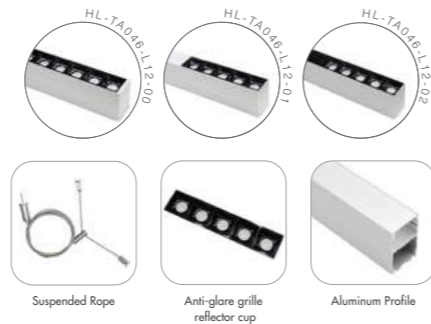

- Professional appearance design, simple and elegant.
- High quality, energy-efficient LED Lighting for environmental protection.
- Built-in power supply, no flicker.
- The lamp can be freely matched with various combinations (Reflector cup/PC cover/Dark cover).
- Professional anti-glare grille reflector cup, anti-glare value UGR<16, light comfort, eye protection.
- Application: offices, conference rooms, supermarkets, schools, home lighting and so on.

