
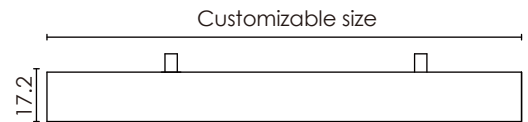


Feature


- This Linear light have a simple, atmospheric design.
- High quality LED light source, energy saving and environmental protection.
- Anodized aluminum profile with good heat dissipation.
- Suitable for offices, conference rooms, supermarkets, home lighting, etc.




Luminaire parameters

Size	L1200*W31.8*H17.2mm
Lm	900lm
Input Voltage	DC12V
Beam Angle	30°/60°/90°
Nominal Power	15W
CCT	2700-6000k
CRI	>80
Protection Grade	IP40
Certification	CE, RoHS
Warranty	3 years


30 degree



90 degree



60 degree



Installation Accessories



Suspended
Rope



Connector




Aluminum Profile




Mounting Clip


Installation

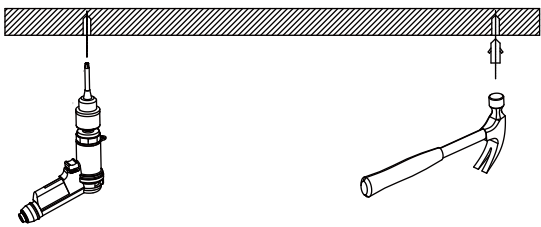


① Prepare the electric drill, hammer, stud;

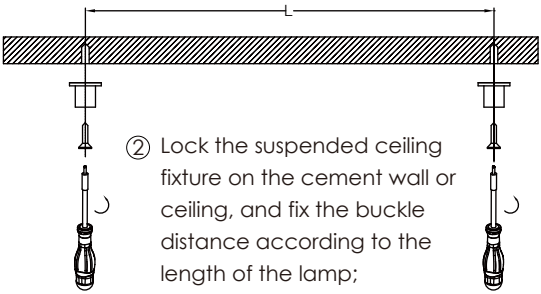

② Lock the suspended ceiling fixture on the cement wall or ceiling, and fix the buckle distance according to the length of the lamp;

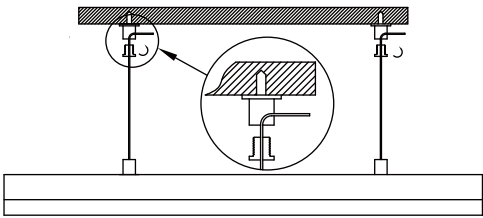

③ Lock the wire sling fixing parts, and fixed the installation length by adjust the wire sling;

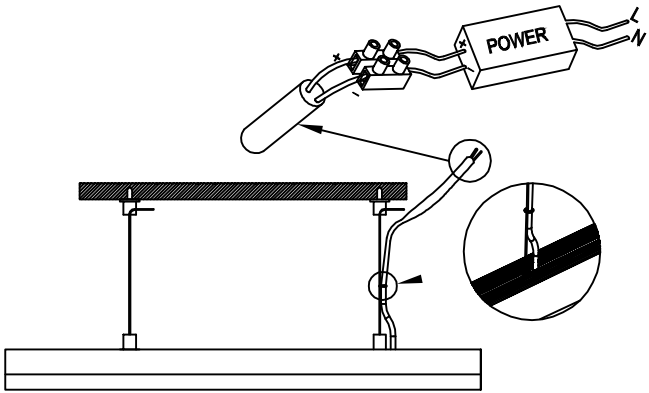

④ Connect the power supply and complete the installation.

Packing



Model	HL-CA033-L12	Carton box	1235*265*215mm
Inner box	1220*50*50mm	QTY/Carton	20 PCS

Notices

- 1.The power supply must be turned off before installation.
- 2.Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3.This product is for indoor use only.
- 4.This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5.The product is not responsible for damage caused by accidental factors or improper use.