

# **HL-PA085-A Stitching Style Chandelier**







#### **Feature**

- -Single light source LED 2835-0.2W, low power consumption, long life, good heat dissipation, energy saving, environmentally friendly;
- -Using an external, low-voltage constant-current power supply is safe and reliable, with no stroboscopic effects.
- -Combination and splicing are simple, and installation is convenient, both vertically and horizontally;
- -The size is large and the lighting is sufficient;
- -Professional anti-glare prism diffuser plate, anti-glare value UGR<19, soft and comfortable light, protect eyes;
- -Applications: Offices, conference rooms, supermarkets, schools, home lighting, etc.

Luminaire parameter	S	
Size	L400*W400*H40mm	
Lm	5280lm	
Input Voltage	AC100-240V	
Beam Angle	120°	
Nominal Power	40W	
CCT	2700-6500k	
CRI	>80	
Protection Grade	IP40	
Certification	CE, RoHS	
Warranty	3 years	

### Installation Accessories



Rope



Connector





End cap





Profile






Diamond Diffusion plate mirror plate






4 Stitches


#### Installation



① Prepare the electric drill, hammer, stud;




③ Lock the wire sling fixing parts, and fixed the installation length by adjust the wire sling;




④ Connect the power supply and complete the installation.

## Splicing method



First, put the lamps together, and then insert the H-shaped profile strips into the slots;




② To fix it, insert the connecting piece between the two lamps, and then lock the screws with a small wrench;



③ Splicing and installation are complete;

#### **Packing**

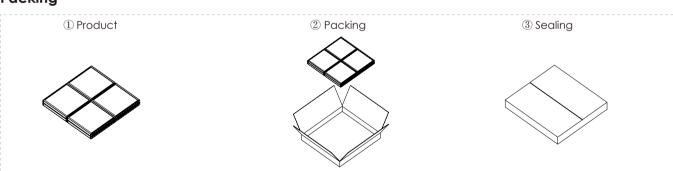

Model	HL-PA085-A	Carton box	510*470*415mm
Inner box	485*455*65mm	QTY/Carton	6 PCS

#### **Notices**

- 1. The power supply must be turned off before installation.
- 2. Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3. This product is for indoor use only.
- 4. This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5. The product is not responsible for damage caused by accidental factors or improper use.