## HL-A006


- -Professional industrial design with sharp lines.
- -Imported PC /PMMA diffuser with uniform and soft lighting.
- -AL6063 aluminum profile with excellent heat dissipation performance.






#### I Basic Parameters

Material	AL6063+PC/PMMA
Surface	Anodized/Painting
Lighting source width	9mm
Length	4m/max
Application	Trimless recessed in drywall.





### I Installation Accessories



Aluminum Profile

#### • Optional cover







Opal matte (PMMA)



Clear (PMMA/PC)



Semi-clear (PMMA/PC)



Black clear (PC)




Opal microprism (PC)



Clear microprism (PC)

		Cover				Suspended Rope		Lighting Source
Model	Cover Model	PC	PMMA	End Cap	Clip	(Set)	Connector	(width)
HL-A006	BAPL005 /BAPL006	Opal Clear Semi-clear Black clear Opal microprism Clear microprism	Opal matte Clear Semi-clear	I	I	1	I	max 9mm

# I Structure image

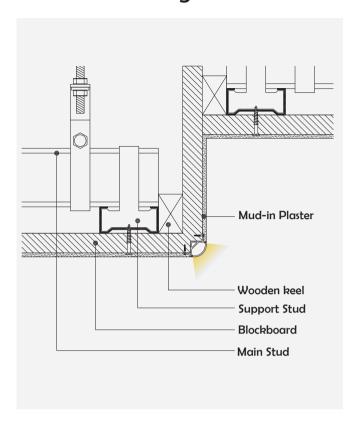

# I Effect image



## I Application

