
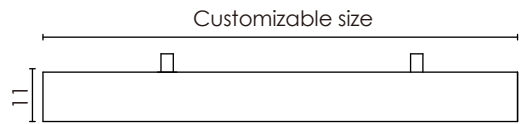




Feature

- Featuring ultra-thin appearance with a design patent.
- High quality PMMA LGP, Uniform and comfortable light.
- Anodized aluminum profile with good heat sink.
- For offices, conference rooms, supermarkets, home lighting, etc.

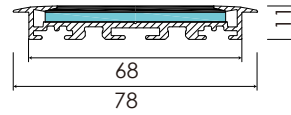

Luminaire parameters

Size	L1000*W78*H11mm
Lm	720lm
Input Voltage	AC100-240V
Beam Angle	120°
Nominal Power	12W
CCT	2700-6500k
CRI	>80
Protection Grade	IP40
Certification	CE, RoHS
Warranty	3 years

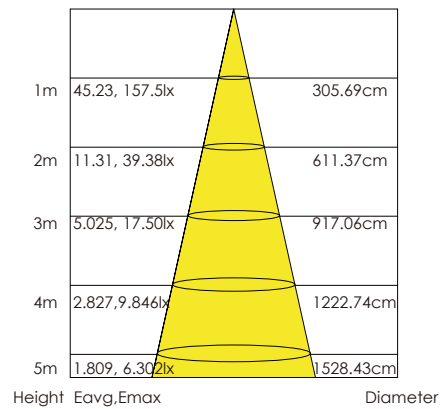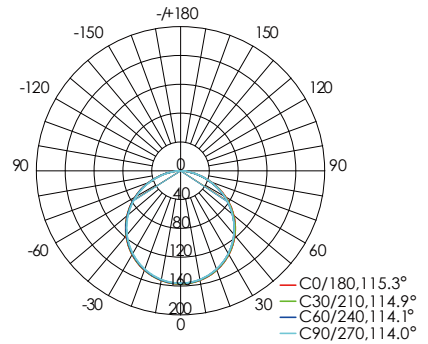

Note: The curve is the illumination area and the average illuminance of the luminaire under different projection distances.

Installation Accessories



End Cap





Mounting Clip




Aluminum Profile

Installation

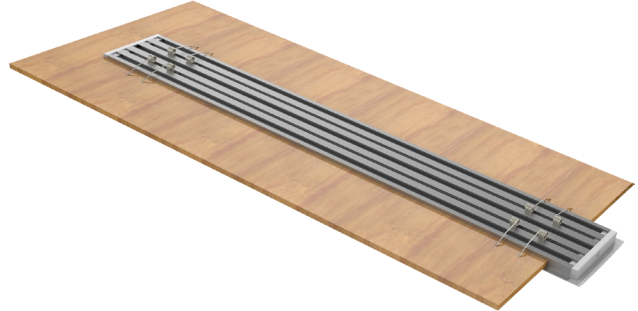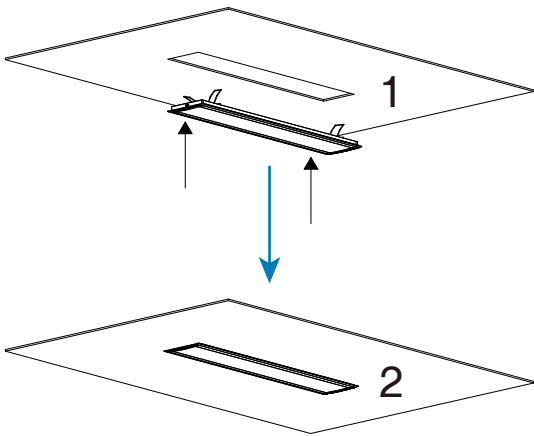

Packing

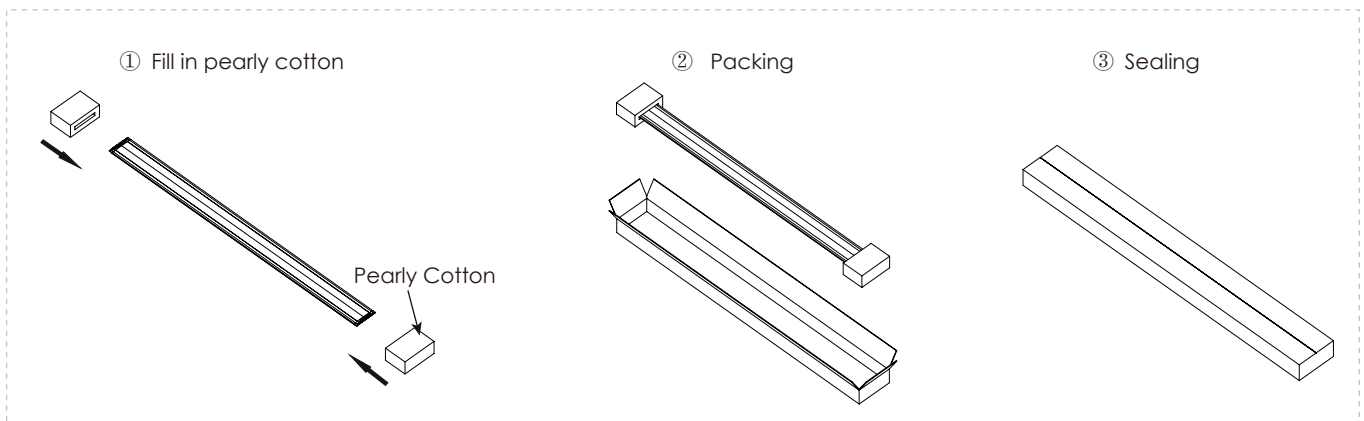

Model	HL-CA010-L10	Carton box	1085*527*189mm
Inner box	1070*128*58mm	QTY/Carton	12 PCS

Notices

- 1.The power supply must be turned off before installation.
- 2.Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3.This product is for indoor use only.
- 4.This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5.The product is not responsible for damage caused by accidental factors or improper use.