


HL-CA011-L10 Linear Pendant Light Specification







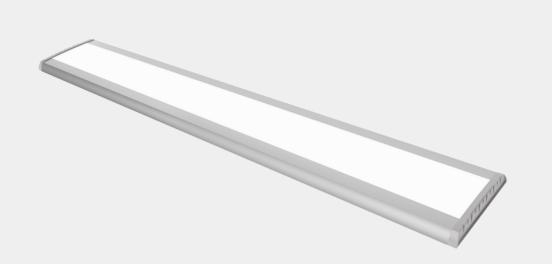



Feature

- -Featuring ultra-thin apperance with a design patent.
- -High quality PMMA LGP, Uniform and comfortable light.
- -Anodized aluminum profile with good heat sink.
- -For offices, conference rooms, supermarkets, home lighting, etc.

Luminaire parameters		
Size	L1000*W83*H11mm	
Lm	720lm	
Input Voltage	AC100-240V	
Beam Angle	120°	
Nominal Power	12W	
CCT	2700-6500k	
CRI	>80	
Protection Grade	IP40	
Certification	CE, RoHS	
Warranty	3 years	


Installation Accessories










Aluminum Profile











Note: The curve is the illumination area and the average illuminance of the luminaire under different projection distances.

Installation

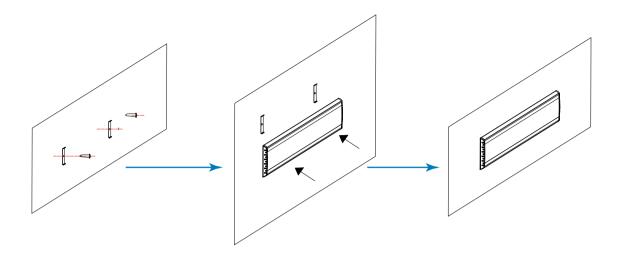

Packing

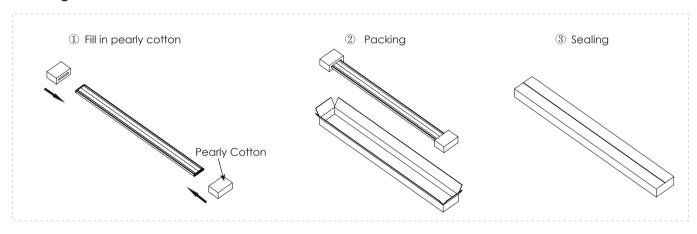

Model	HL-CA011-L10	Carton box	1076*527*189mm
Inner box	1061*128*58mm	QTY/Carton	12 PCS

Notices

- ${\it 1.} \hbox{The power supply must be turned off before installation.}$
- 2. Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3. This product is for indoor use only.
- 4. This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5. The product is not responsible for damage caused by accidental factors or improper use.