


HL-CA051-L12 Linear Pendant Light Specification

150

П

150

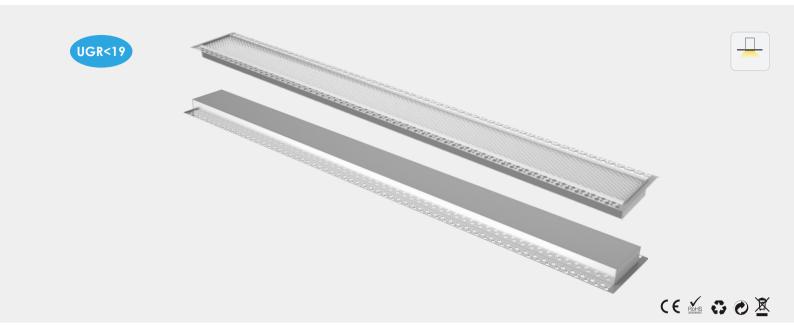

Feature

- -Professional appearance design, simple and elegant.
- -High quality, energy-efficient LED Lighting for environmental protection.
- -Anodized aluminum profile with good heat sink.
- -External power supply, no flicker.
- -Optional cover for the lamp (PC diffuser cover / prism cover).
- -Professional anti-glare prism diffusion plate, anti-glare value UGR < 19, light comfortable and soft, protect eyes.
- -Application: offices, conference rooms, super markets, schools, home

Luminaire parameters		
Size	L1200*W150*H37mm	
Lm	6000lm	
Input Voltage	AC100-240V	
Beam Angle	120°	
Nominal Power	60W	
CCT	2700-6500k	
CRI	>80	
Protection Grade	IP40	
Certification	CE, RoHS	
Warranty	3 years	

Installation Accessories






(optionally)





Anti-glare prism Aluminum Profile diffusion plate (optionally)

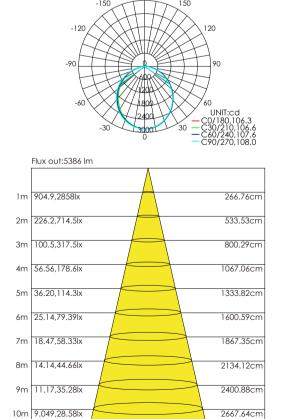

Customizable size


-/+180


Note: The curve is the illumination area and the average illuminance of the luminaire under different projection distances.

HeightEavg, Emax

Diameter


Installation





Step 2

Packing

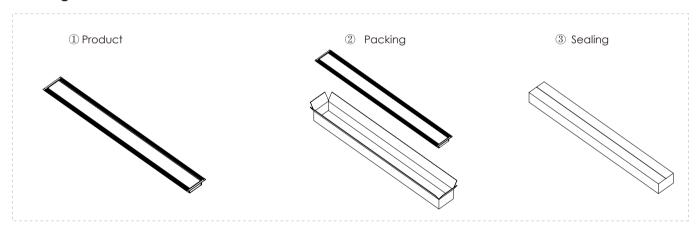

Model	HL-CA051-L12	Carton box	1265*605*205mm
Inner box	1250*195*95mm	QTY/Carton	6 PCS

Notices

- 1. The power supply must be turned off before installation.
- 2. Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3. This product is for indoor use only.
- 4. This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5. The product is not responsible for damage caused by accidental factors or improper use.