



Feature

- Modular hexagonal linear lighting offer infinite possibilities.
- High quality, energy-efficient LED Lighting for environmental protection.
- The power supply is built-in and the wiring is of the PUSH-IN shrapnel type. It is easy to install, disassemble, and maintain.
- For offices, conference rooms, supermarkets, home lighting, airports, museums, libraries, corridors, cinemas, hotels, etc.



Modular



DIY Splicing



Customizability



Easy Maintenance




Scalability



Flexibility




Shrapnel-type Wiring



Luminaire parameters

Model	HL-PB5075A-E08
Size	800*692mm
Nominal Power	40W
Lm	6000lm±10%(@4000K)
Beam Angle	110°-120°
Input Voltage	AC100-277V
CCT	2700-6500K
CRI	>80
Protection Grade	IP20
Certification	CE、ROHS、UL
Warranty	3 years

Units:mm

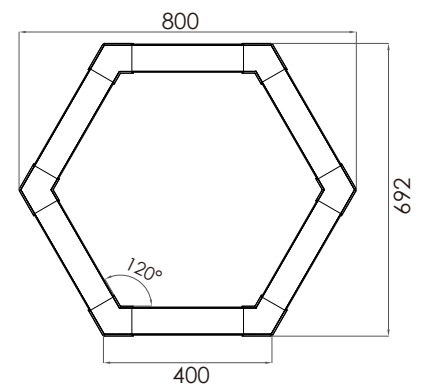


Installation Accessories



module 1



module 2



Accessory


Installation

Step 1: Assembly product


Please assemble the modules corresponding to the correct angles.




①

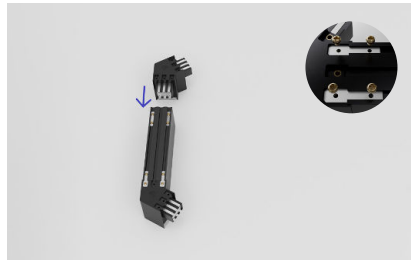


②

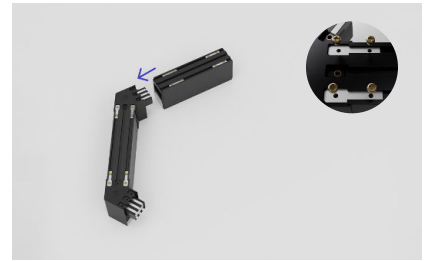


③

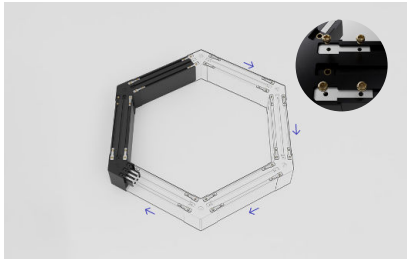

④

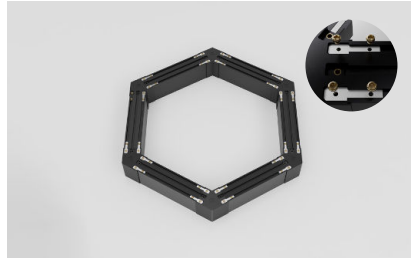







⑤

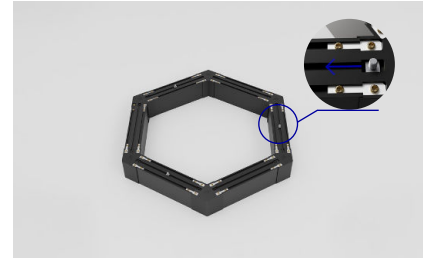


⑥

Step 2: Install

Please make sure that the place of installation could stand 10 times the weight of itself before installing in a place where is no vibration, no swing, and no fire risk.

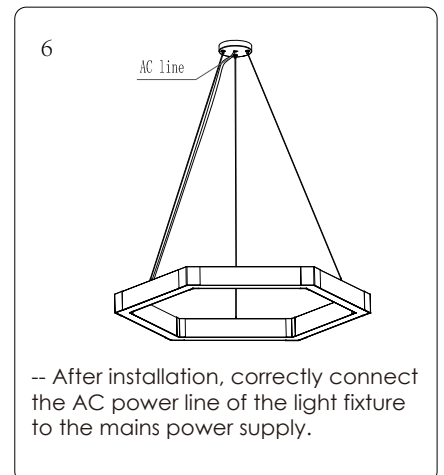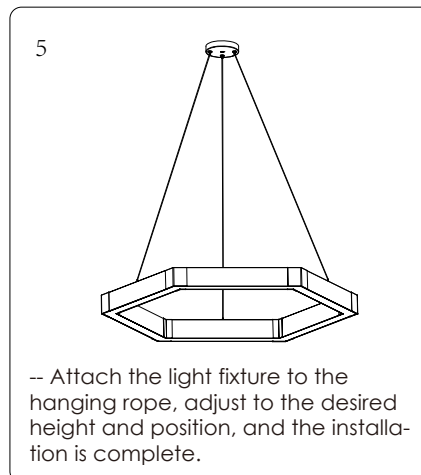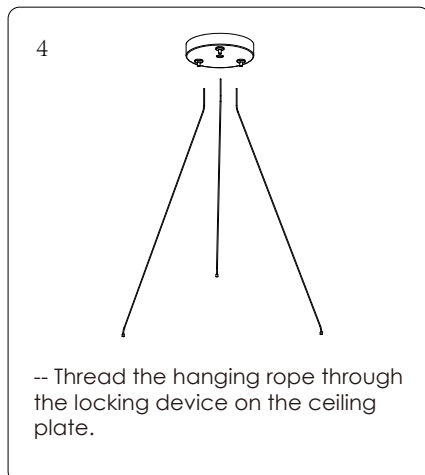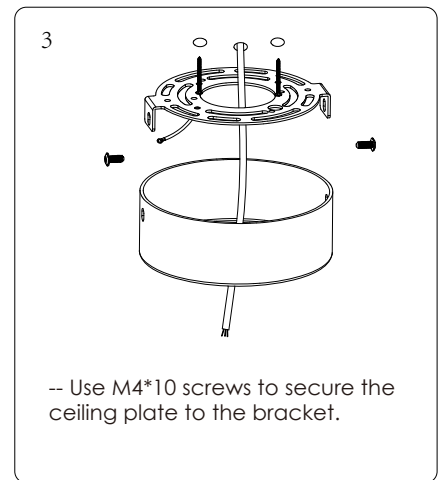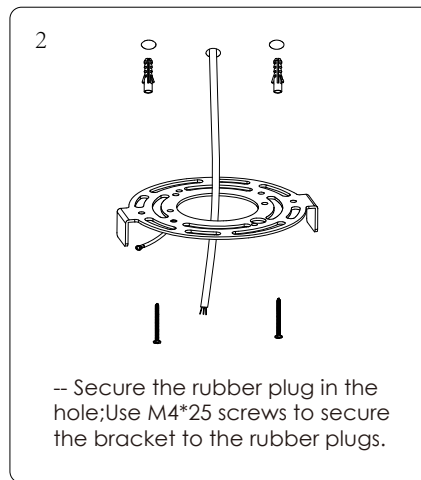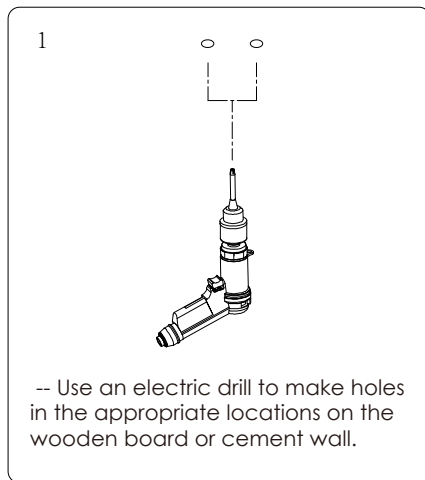

Packing

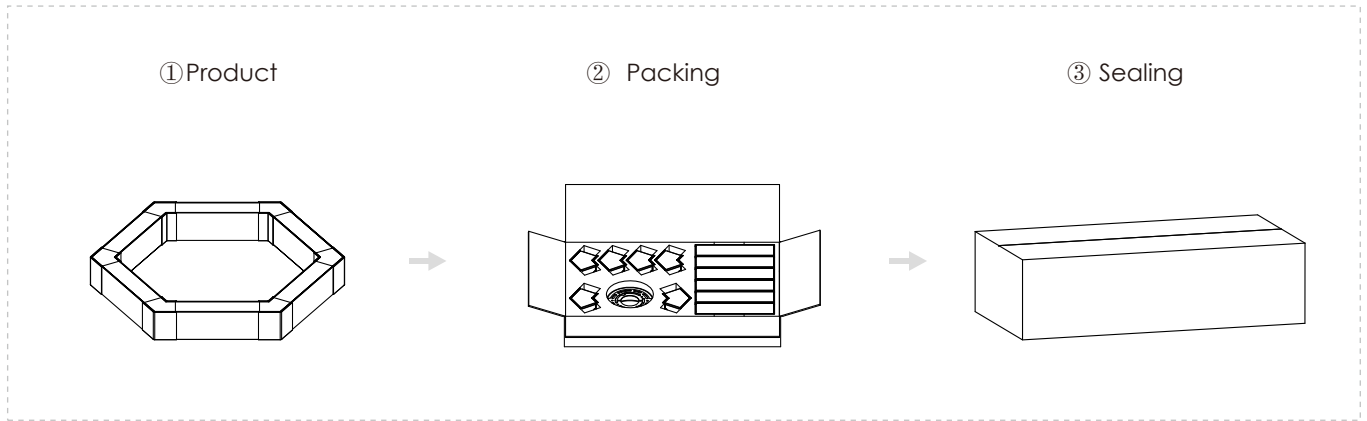

Model HL-PB5075A-E08

Carton box 690*360*440mm

Inner box 670*340*100mm

QTY/Carton 4 PCS

USER INSTRUCTIONS

- 1.The installation of the unit must be done by a qualified electrician.
- 2.The unit must be earthed in case an earth connecting point exists.
- 3.Ensure that the mains is switched off during servicing.
- 4.Do not use bulb(s) bigger than the indicated on units name-plate or packaging.
- 5.Ensure that after the installation,the unit is properly fixed and the cable clamps (if exist)are well tightened.
- 6.Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation.