

HL-TA047-L12 Linear Pendant Light Specification



Feature

- -Professional appearance design, simple and elegant.
- -High quality, energy-efficient LED Lighting for environmental protection.
- -External power supply, no flicker.
- -Optional cover for the lamp (Reflector cup / PC cover).
- -Professional anti-glare grille reflector cup, anti-glare value UGR<16, light comfort, eye protection.
- -Application: offices, conference rooms, supermarkets, schools, home lighting and so on.

Luminaire parameters			
Size	L1200*W84*H44mm		
Lm	3400lm / 4500lm		
Input Voltage	AC100-240V		
Beam Angle	15°/30°/45°		
Nominal Power	50W		
CCT	2700-6500k		
CRI	>80		
Protection Grade	IP40		
Certification	CE, RoHS		
Warranty	3 years		

Installation Accessories



End Cover






reflector cup




(optionally)




Aluminum Profile











Note: The curve is the illumination area and the average illuminance of the luminaire under different projection distances.

Installation

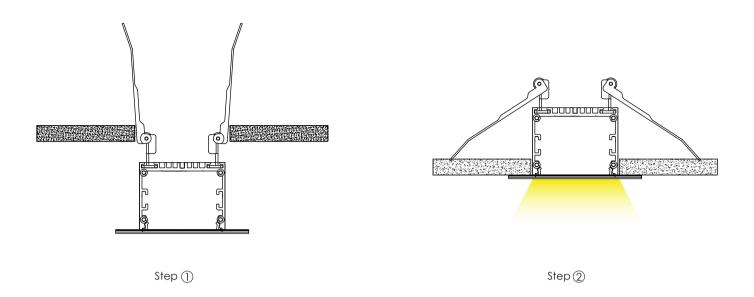

Packing

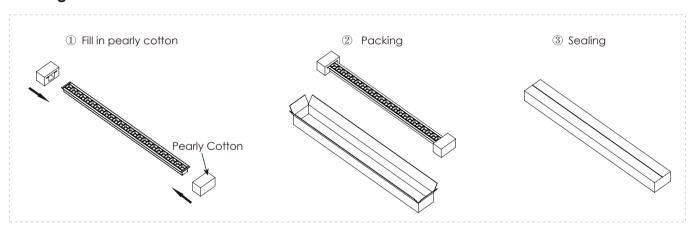

Model	HL-TA047-L12	Carton box	1263*474*201mm
Inner box	1248*153*93mm	QTY/Carton	6 PCS

Notices

- ${\it 1.} \hbox{The power supply must be turned off before installation.}$
- 2. Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3. This product is for indoor use only.
- 4. This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5. The product is not responsible for damage caused by accidental factors or improper use.