


HL-CA033-L12 Linear Pendant Light Specification



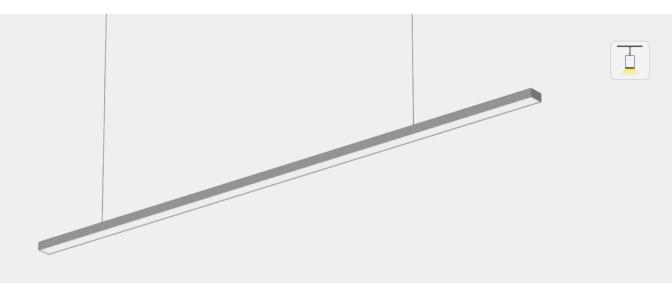

Feature


- -This Linear light have a simple, atmospheric design.
- -High quality LED light source, energy saving and environmental protection.
- -Anodized aluminum profile with good heat dissipation.
- -Suitable for offices, conference rooms, supermarkets, home lighting, etc.

31.8	
	17.2
Lens angle:30°/6	0°/90°

	Custom	nizable size	_
~I	П	П	_
17.2			


Luminaire parameters	5
Size	L1200*W31.8*H17.2mm
Lm	900lm
Input Voltage	DC12V
Beam Angle	30°/60°/90°
Nominal Power	15W
CCT	2700-6000k
CRI	>80
Protection Grade	IP40
Certification	CE, RoHS
Warranty	3 years

30 degree



60 degree

90 degree



Installation Accessories




Connector

Aluminum Profile





Mounting Clip

Installation




1) Prepare the electric drill, hammer, stud;





3 Lock the wire sling fixing parts, and fixed the installation length by adjust the wire sling;



(4) Connect the power supply and complete the installation.

Packing



Model	HL-CA033-L12	Carton box	1235*265*215mm
Inner box	1220*50*50mm	QTY/Carton	20 PCS

Notices

- 1. The power supply must be turned off before installation.
- 2. Make sure the product is mounted under the surface of the object to be installed, and finally turn on the power to light up.
- 3. This product is for indoor use only.
- 4. This product is warranted for 3 years and problems occur within 3 years (except for human factors and accidental factors), free maintenance.
- 5. The product is not responsible for damage caused by accidental factors or improper use.