

HL-A006




- Professional industrial design with sharp lines.
- Imported PC /PMMA diffuser with uniform and soft lighting.
- AL6063 aluminum profile with excellent heat dissipation performance.



I Basic Parameters

Material	AL6063+PC/PMMA
Surface	Anodized/Painting
Lighting source width	9mm
Length	4m/max
Application	Trimless recessed in drywall.

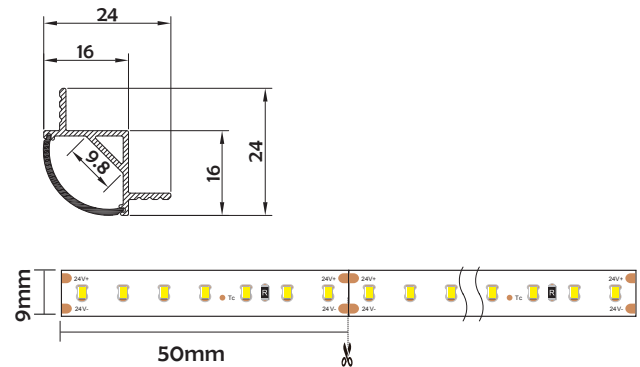

I Installation Accessories



Aluminum Profile

• Optional cover



Opal
(PC)




Opal matte
(PMMA)



Clear
(PMMA/PC)



Semi-clear
(PMMA/PC)



Black clear
(PC)




Opal microprism
(PC)



Clear microprism
(PC)

Model	Cover Model	Cover		End Cap	Clip	Suspended Rope (Set)	Connector	Lighting Source (width)
		PC	PMMA					
HL-A006	BAPL005 /BAPL006	Opal Clear Semi-clear Black clear Opal microprism Clear microprism	Opal matte Clear Semi-clear	/	/	/	/	max 9mm

I Structure image

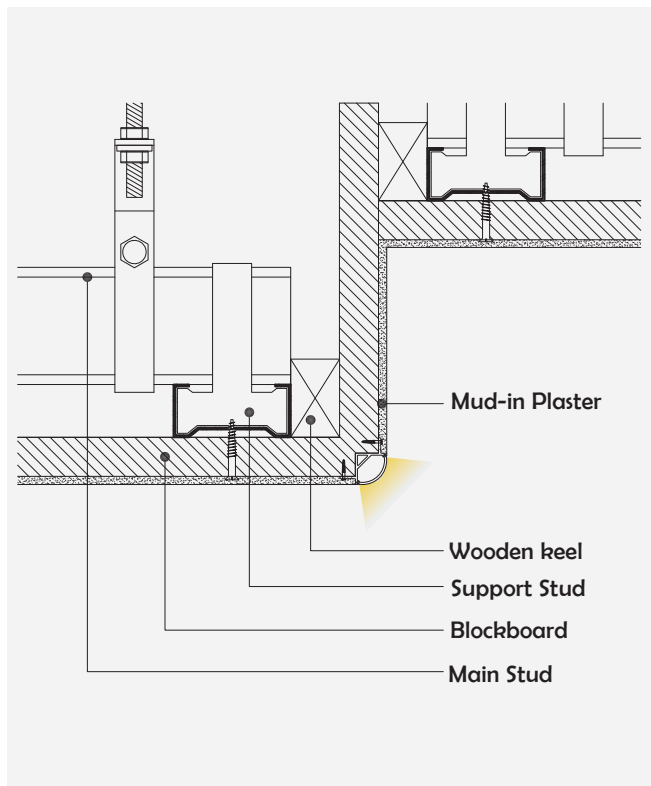

I Effect image



I Application

