HL-A040


- -Recessed design, integrated into architecture.
- -Imported PC /PMMA diffuser with uniform and soft lighting.
- -AL6063 aluminum profile with high-quality surface treatment.
- -Closed-fitting end cap without screw, easier installation.





I Basic Parameters

Material	AL6063+PC/PMMA
Surface	Anodized/Painting
Lighting source width	12mm
Length	4m/max
Application	Recessed in exposed wall cornerindoor lighting.



I Installation Accessories






Aluminum Profile


End Cap

Optional cover



	Cover			Suspended Rope		Lighting Source
Model PC	PMMA	End Cap	Clip	(Set)	Connector	(width)
Opal matte Clear Semi-clear Black clear Black opal	Opal matte Clear Semi-clear	Plastic	I	1	I	max 12mm
	Opal Opal Opal Opal Matte Clear Semi-clear Black clear Black opal	Model PC PMMA Opal Opal matte Opal matte Clear Clear Semi-clear Black clear	Model PC PMMA End Cap Opal Opal matte Opal matte Clear Clear Semi-clear Black clear Black opal	Model PC PMMA End Cap Clip Opal Opal matte Opal matte Clear Clear Semi-clear Black clear Black opal	Model PC PMMA End Cap Clip (Set) Opal Opal matte Opal matte Clear Clear Semi-clear Black clear Black opal	Model PC PMMA End Cap Clip (Set) Connector Opal Opal matte Clear Clear Semi-clear Black clear Black opal

I Structure image

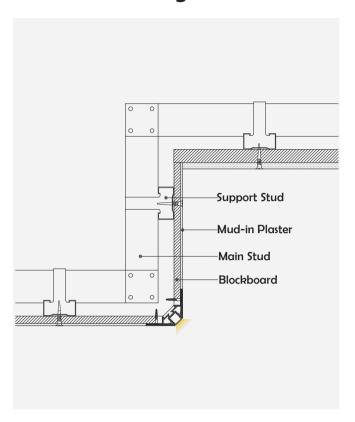

I Effect image



I Application

