


# Anti-glare Silicone Sleeve

Model:HL-FX1212



## Features

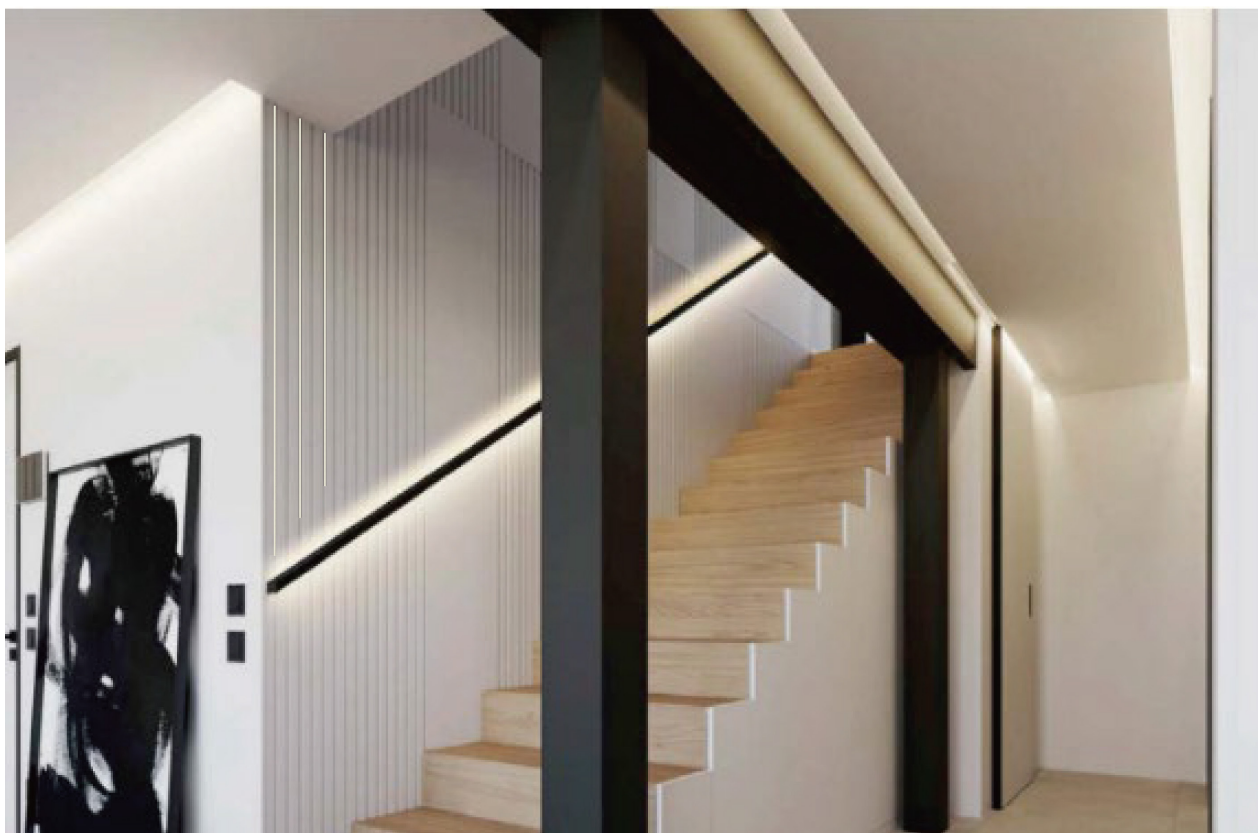


- Professional structural design, high luminous efficiency, consistent color temperature, and no light spots.
- Made of silicone material, it is resistant to high temperatures and can be used outdoors.
- Can be used in harsh environments and has good waterproof performance.
- Good flexibility, easy to bend, easy to shape, and resistant to pulling.
- Honeycomb-shaped surface, unique appearance, and anti-glare.

## Parameter

### 1212 Anti-glare positive light silicone sleeve


PCB(mm)	8
Weight(g/m)	161
LED	2835/3535/5050
Color	White/Black
Working temperature	-20~50°C
CCT	3000K/4000K/6500K /R.G.B/SPI-RGB

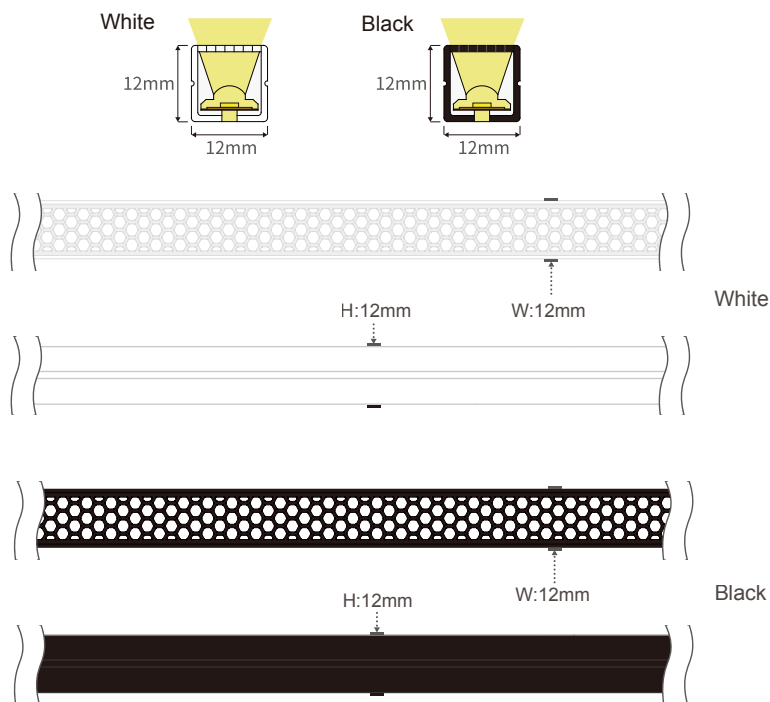

## Accessory

Accessories can be freely selected and matched.

Wrap-around end cap  
(IP65/IP66)

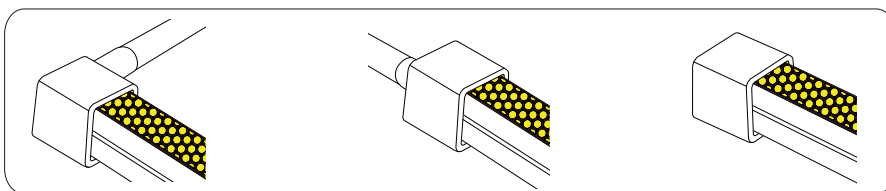


Side outlet wire end cap

Front outlet wire end cap

End cap







Accessory

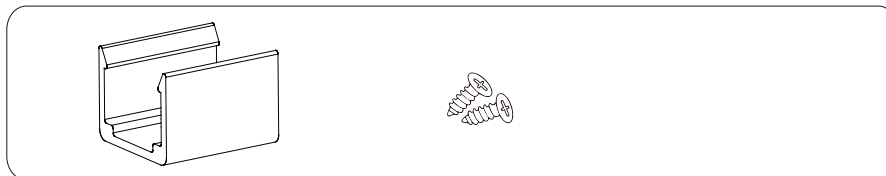


Clip

Screw


## Installation accessories

	Model	Weight	Size	Cross-sectional view	Installation
	Alu profile	80g/m	14.4x10mm		
	3D curved profile	53g/m	13x9mm		


## Wiring Method

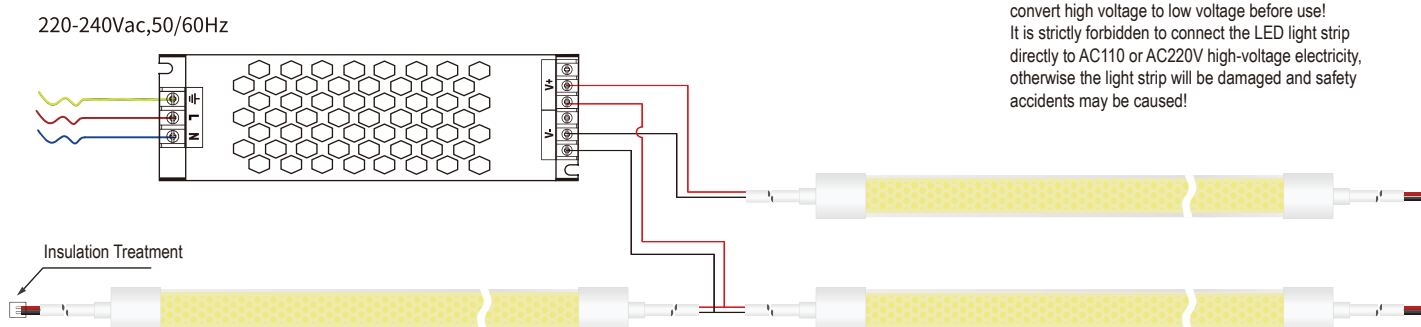


## RGB Connection

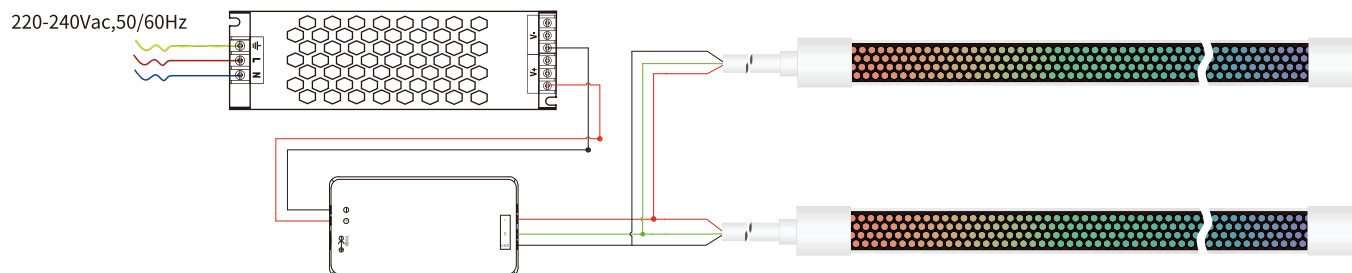


## Installation




Surface-mounted Ceiling Type

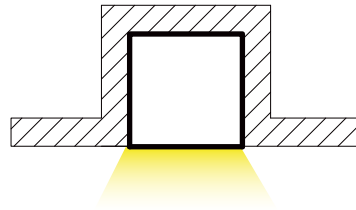

Recessed Embedded Type



Side-mounted Embedded Type

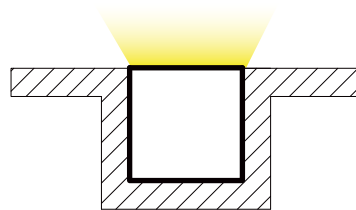


Recessed In-ground Type


## Warning




Do not twist



Do not hang using  
the power cord



Do not step on it  
forcefully



Avoid bending at a  
small angle



**OUR EMAIL**

admin@hllcd.com



**OUR PHONE**

(86)-755-27606785




**OUR WEBSITE**

www.hllcd.com



# Anti-glare Silicone Sleeve

Model:HL-FX1610

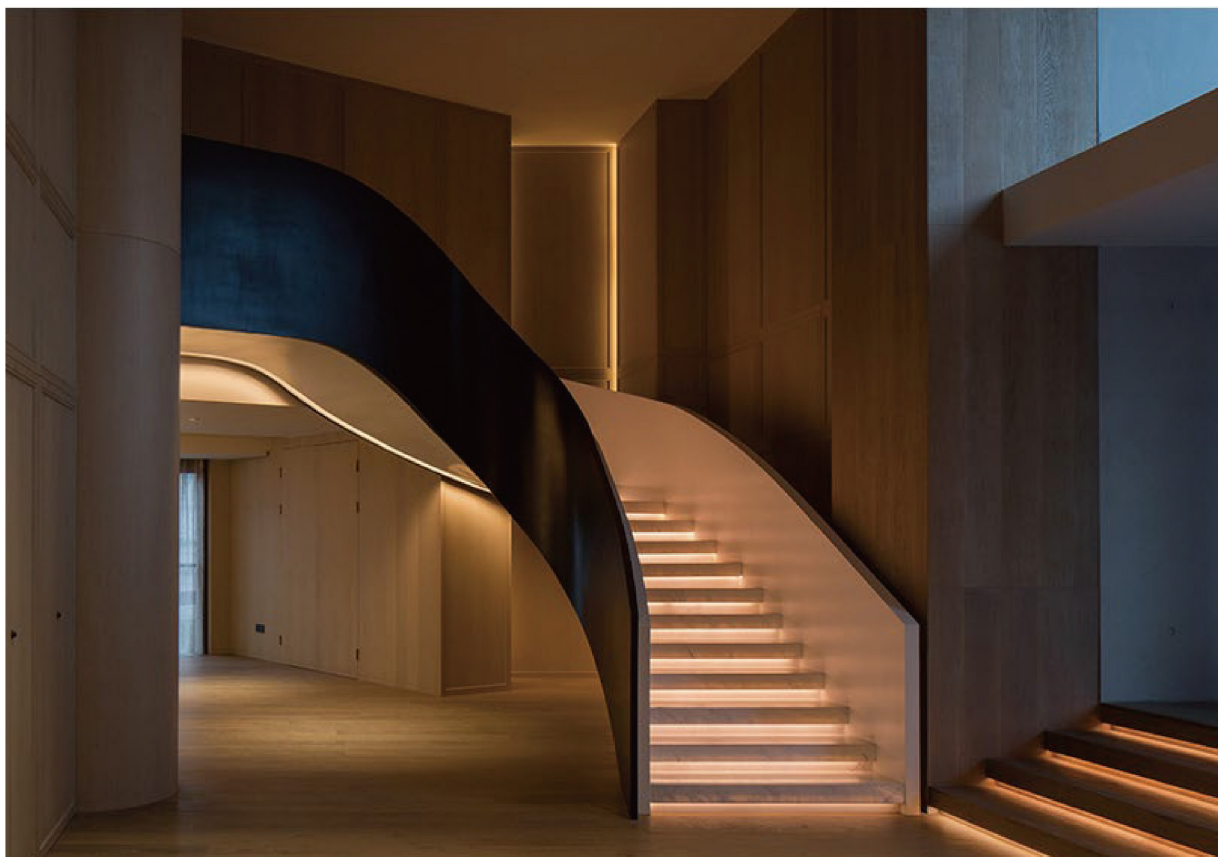

## Features





- Professional structural design, high luminous efficiency, consistent color temperature, and no light spots.
- Made of silicone material, it is resistant to high temperatures and can be used outdoors.
- Can be used in harsh environments and has good waterproof performance.
- Good flexibility, easy to bend, easy to shape, and resistant to pulling.
- Honeycomb - shaped surface, unique appearance, and anti - glare.

## Parameter

### 1610 Anti-glare positive light silicone sleeve


PCB(mm)	12
Weight(g/m)	155
LED	2835/3535/5050
Color	White base with black surface
Working temperature	-20~50°C
CCT	3000K/4000K/6500K /R.G.B/RGB+IC

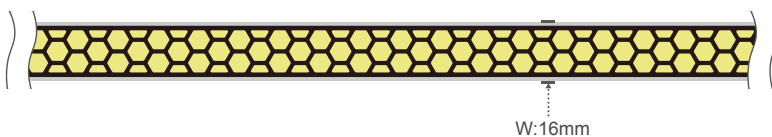


## Accessory

Accessories can be freely selected and matched.


Wrap-around end cap  
(IP65/IP66)



Side outlet wire end cap




Front outlet wire end cap



End cap

Accessory









Clip




Screw


## Installation accessories

	Model	Weight	Size	Cross-sectional view	Installation
	Alu profile	220g/m	17.2x11.4mm		
	3D curved profile	59g/m	16.4x8.8mm		

## Wiring Method

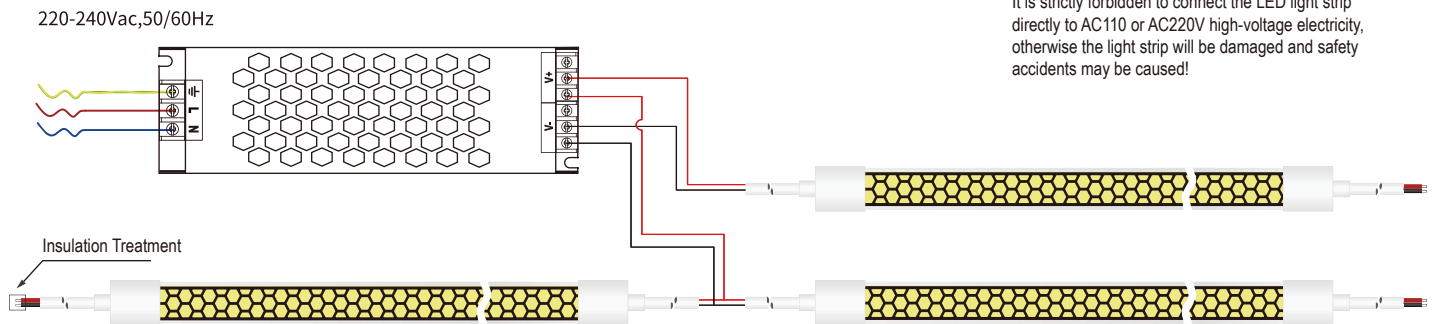


## DMX512 Connection

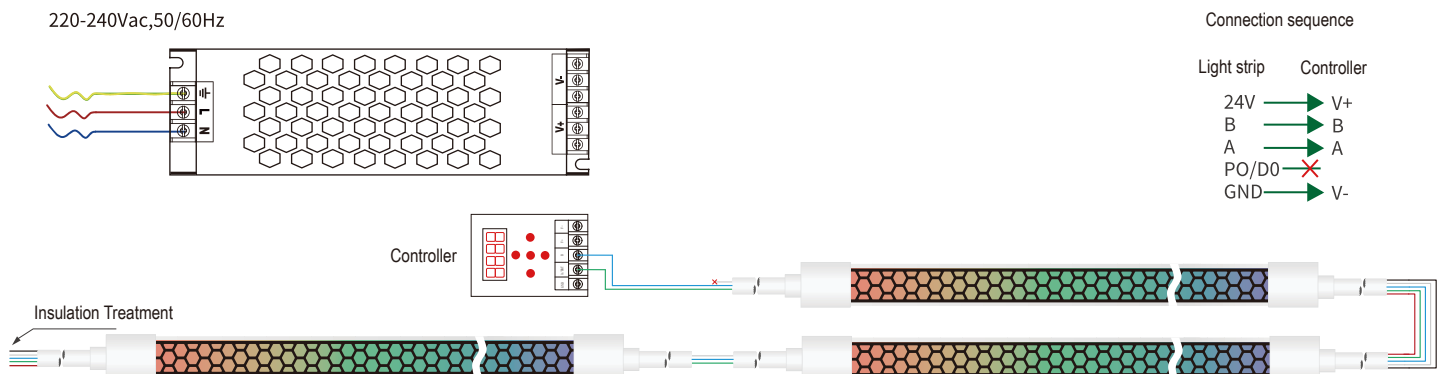


Power supply in the middle, each side can be connected with 5 meters, totaling 10 meters.


## Installation




Surface-mounted Ceiling Type

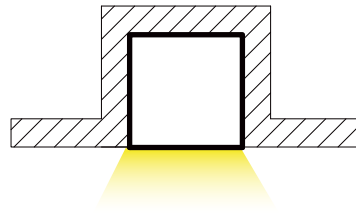

Recessed Embedded Type



Side-mounted Embedded Type

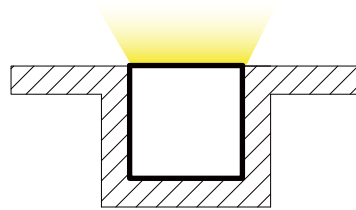


Recessed In-ground Type


## Warning




Do not twist



Do not hang using  
the power cord



Do not step on it  
forcefully



Avoid bending at a  
small angle



**OUR EMAIL**

admin@hlled.com



**OUR PHONE**

(86)-755-27606785



**OUR WEBSITE**


www.hlled.com

# Anti-glare Silicone Sleeve

Model:HL-FX1616




## Features

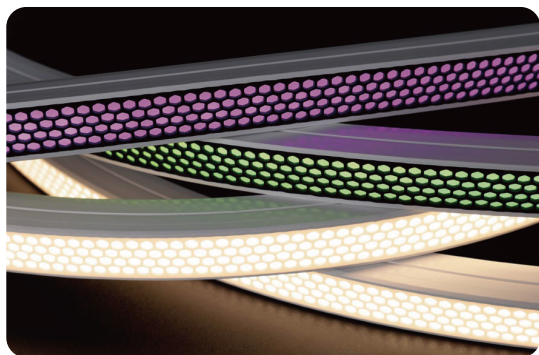

- Professional structural design, high luminous efficiency, consistent color temperature, and no light spots.
- Made of silicone material, it is resistant to high temperatures and can be used outdoors.
- Can be used in harsh environments and has good waterproof performance.
- Good flexibility, easy to bend, easy to shape, and resistant to pulling.
- Honeycomb - shaped surface, unique appearance, and anti - glare.


## Parameter

### 1616 Anti-glare positive light silicone sleeve



PCB(mm)	12
Weight(g/m)	253
LED	2835/3535/5050
Color	White base with white surface White base with black surface
Working temperature	-20~50°C
CCT	3000K/4000K/6500K /R.G.B/SPI-RGB


White base with white surface



H:16mm

W:16mm

White base with black surface




H:16mm

W:16mm

## Accessory

Accessories can be freely selected and matched.

Wrap-around end cap  
(IP65/IP66)

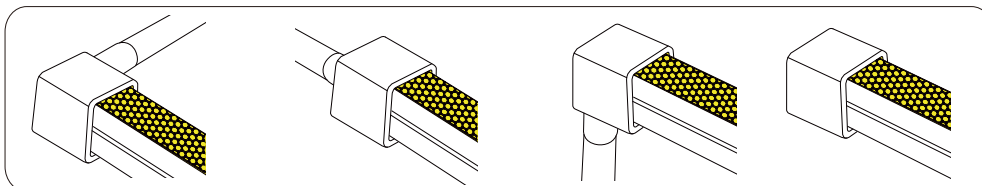


Side outlet wire end cap

Front outlet wire end cap

Bottom outlet wire end cap

End cap

Accessory









Clip




Screw


## Installation accessories

	Model	Weight	Size	Cross-sectional view	Installation
	Alu profile	220g/m	17.2x11.4mm	11.4mm 17.2mm 	
	3D curved profile	59g/m	16.4x8.8mm	8.8mm 16.4mm 	

## Wiring Method

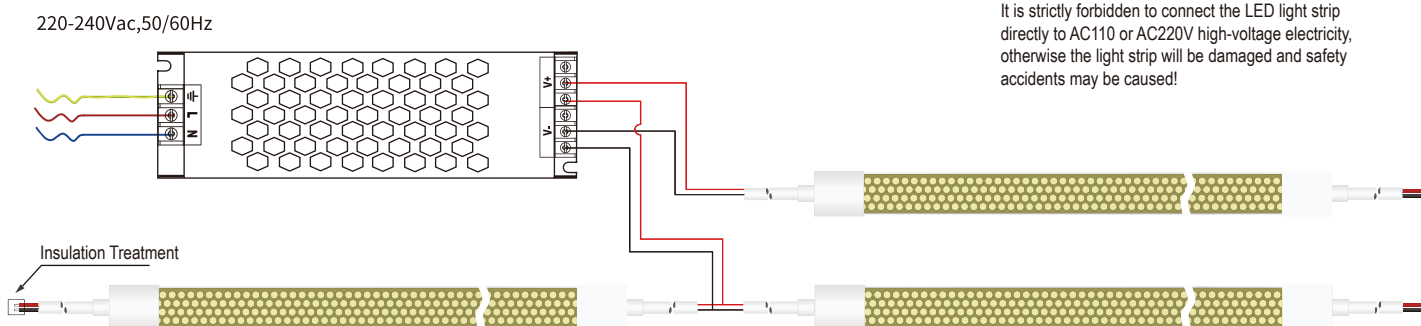


## RGB Connection

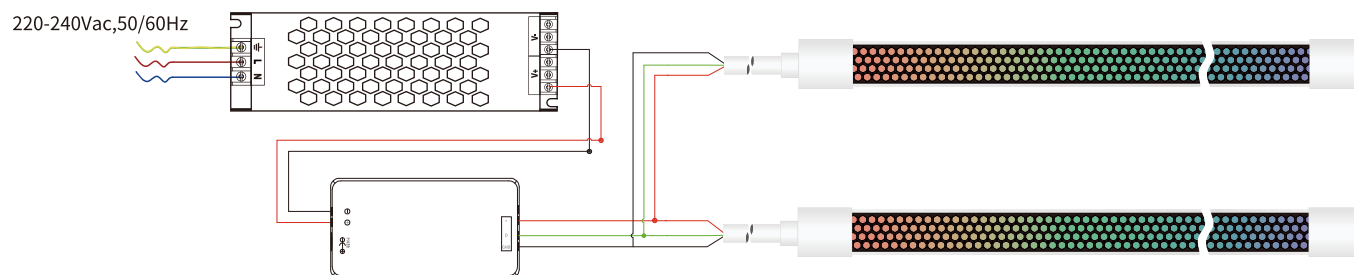





## Installation




Surface-mounted Ceiling Type

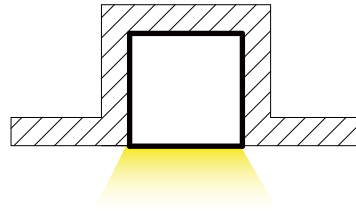

Recessed Embedded Type



Side-mounted Embedded Type

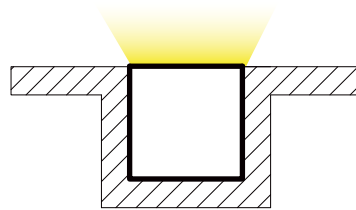


Recessed In-ground Type


## Warning




Do not twist



Do not hang using  
the power cord



Do not step on it  
forcefully



Avoid bending at a  
small angle



**OUR EMAIL**

admin@hiled.com



**OUR PHONE**

(86)-755-27606785



**OUR WEBSITE**

www.hiled.com



# Anti-glare Silicone Sleeve

Model:HL-FX2010



## Features




- Professional structural design, high luminous efficiency, consistent color temperature, and no light spots.
- Made of silicone material, it is resistant to high temperatures and can be used outdoors.
- Can be used in harsh environments and has good waterproof performance.
- Good flexibility, easy to bend, easy to shape, and resistant to pulling.
- Honeycomb - shaped surface, unique appearance, and anti - glare.

## Parameter

### 2010 Anti-glare positive light silicone sleeve


PCB(mm)	12
Weight(g/m)	195
LED	2835/3535/5050
Color	White base with black surface
Working temperature	-20~50°C
CCT	3000K/4000K/6500K /R.G.B/RGB+IC

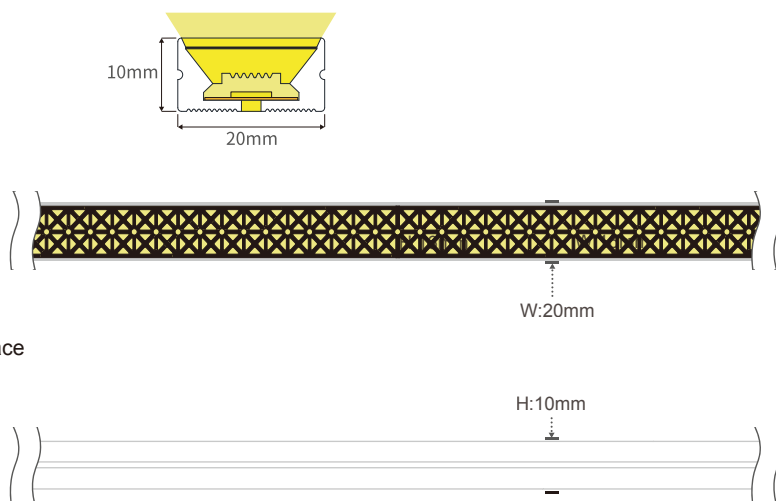


## Accessory

Accessories can be freely selected and matched.







Wrap-around end cap  
(IP65/IP66)

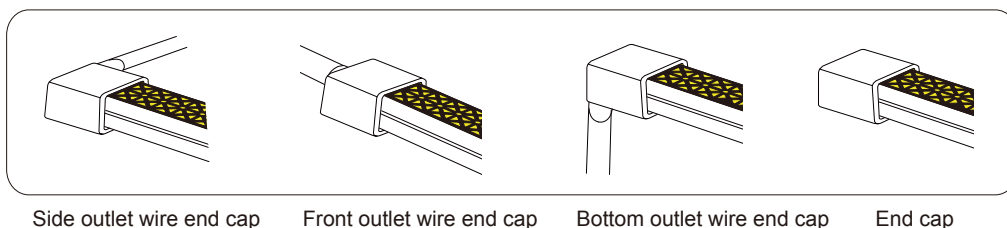


Accessory

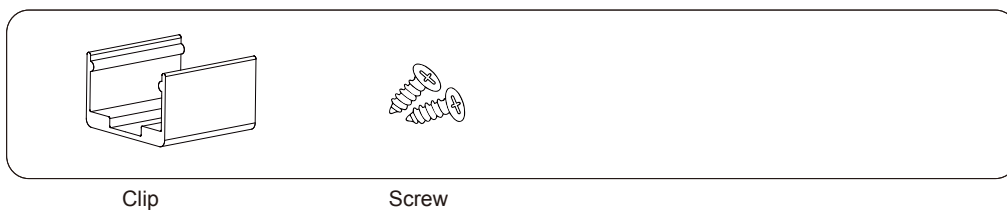


## Installation accessories

	Model	Weight	Size	Cross-sectional view	Installation
	Alu profile	180g/m	22.4x14.3mm		
	3D curved profile	94.6g/m	21.3x10.2mm		

## Wiring Method

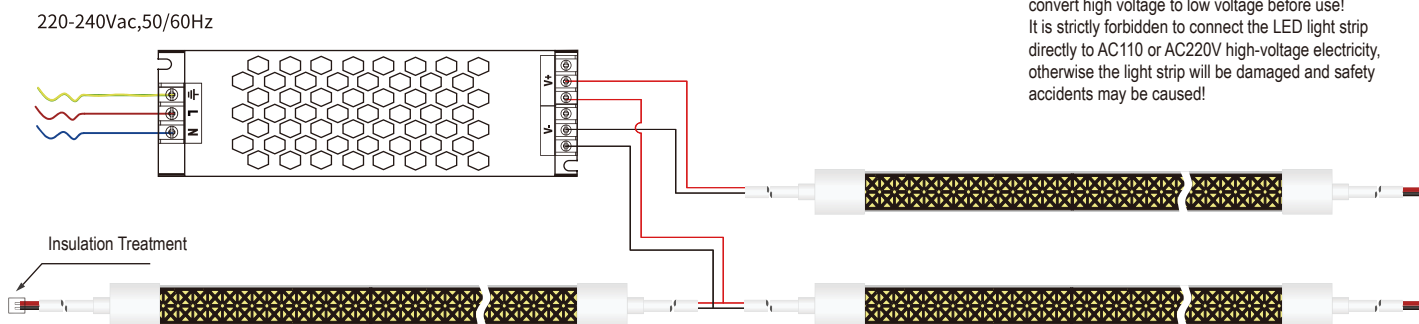


## DMX512 Connection

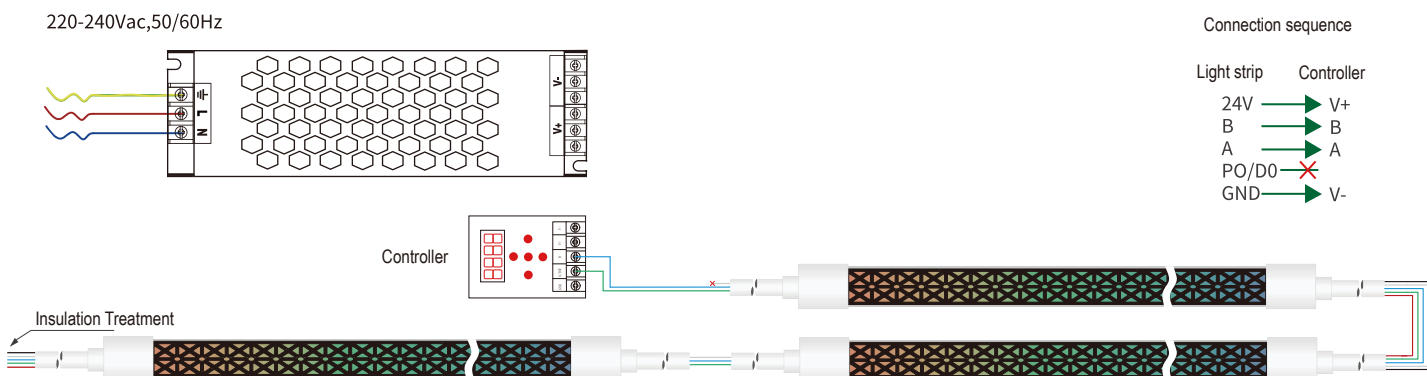


Power supply in the middle, each side can be connected with 5 meters, totaling 10 meters.


## Installation




Surface-mounted Ceiling Type

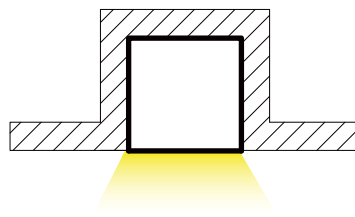

Recessed Embedded Type



Side-mounted Embedded Type

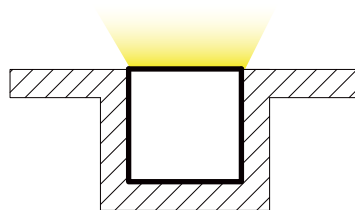


Recessed In-ground Type


## Warning




Do not twist



Do not hang using  
the power cord



Do not step on it  
forcefully



Avoid bending at a  
small angle



**OUR EMAIL**

admin@hiled.com



**OUR PHONE**

(86)-755-27606785



**OUR WEBSITE**

www.hiled.com