




HL-UA046-L12

Up & Down Emitting Linear Light


- Extruded aluminum housing with excellent heat dissipation, perfectly matching open-plan interior space design.
- Three lighting distribution modes optional: 70% downward light + 30% upward light, 90% downward light + 10% upward light, 100% pure downward light.
- Switchable CCT: 2700K/3500K/4500K/5500K/6500K.
- Easy to install with dedicated suspension accessories, enabling quick pendant mounting.
- Wide application: offices, meeting rooms, supermarkets, schools, residential lighting and other indoor occasions.

Luminaire parameters

Size	L1200*W54*H84mm
LM(@4500K)	4500lm@50w / 3600lm@40w / 2700lm@30w
Input Voltage	AC220-240V
Beam Angle	120°
Power Distribution	30W / 40W / 50W
CCT Distribution	2700K / 3500K / 4500K / 5500K / 6500K
Lighting Distribution	(up)30% / 10% / 0% (down)70% / 90% / 100%
Color	Black / White / Silver
Protection Grade	IP40
Certification	CE / ROHS
CRI	>80
Warranty	3 years

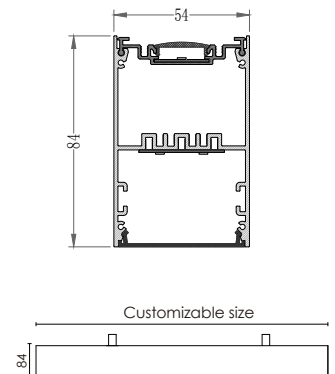

Control panel adjustable parameters:

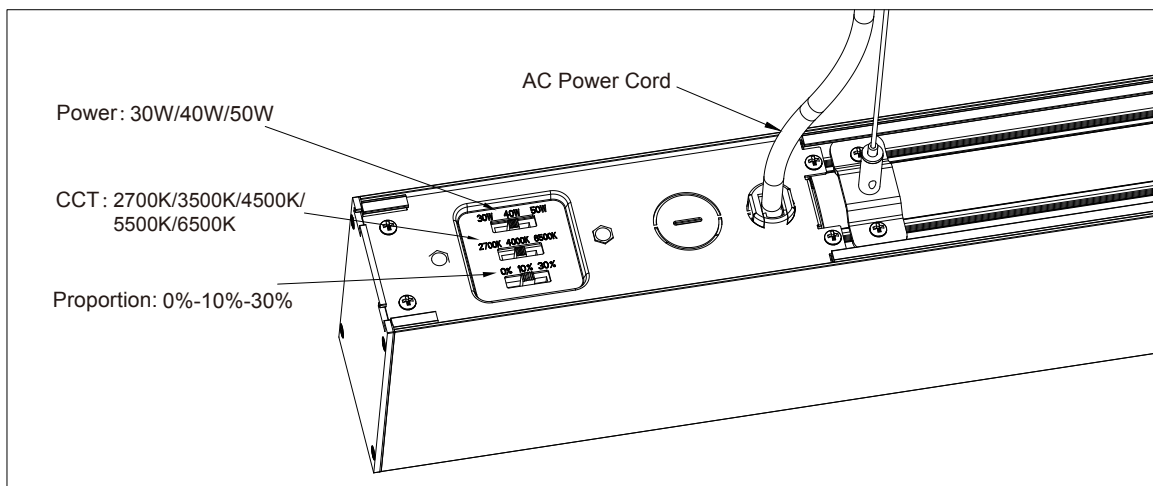


Installation Accessories




Suspended Rope

Installation


- 1、Drill mounting holes with an electric drill according to the size requirements, then insert expansion rubber plugs into the holes.

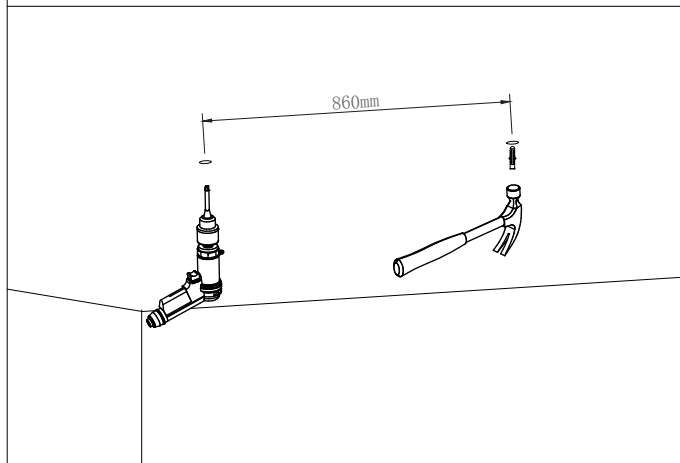


- 2、Pre-fix the mounting bases onto the ceiling.

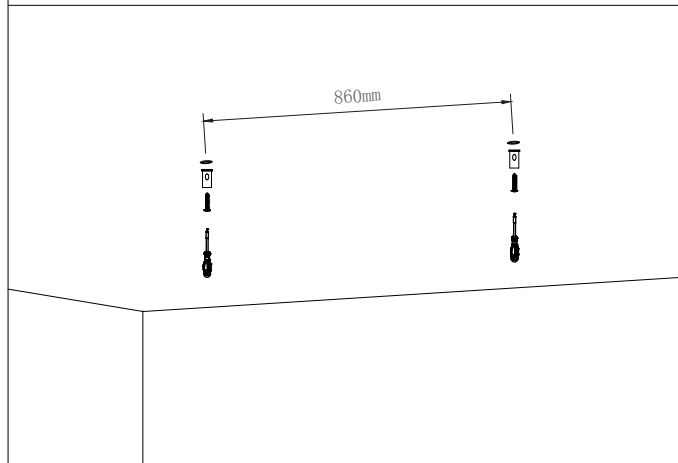


- 3、Fasten bracket A with the screw at the top of the suspension cable, tilt and lower the bracket at a proper angle, rotate it to lock into the clamping groove, then tighten the screw.

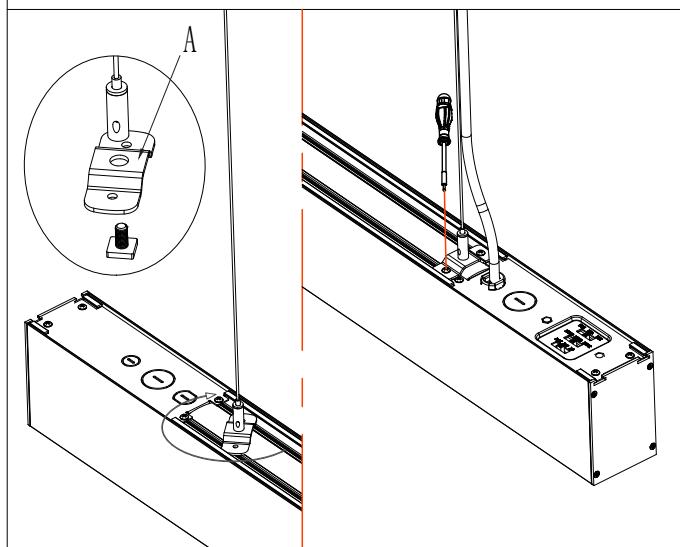

- 4、Thread the steel suspension cables through the steel wire self-locking devices, adjust to the proper height, then fasten the devices onto the mounting bases.

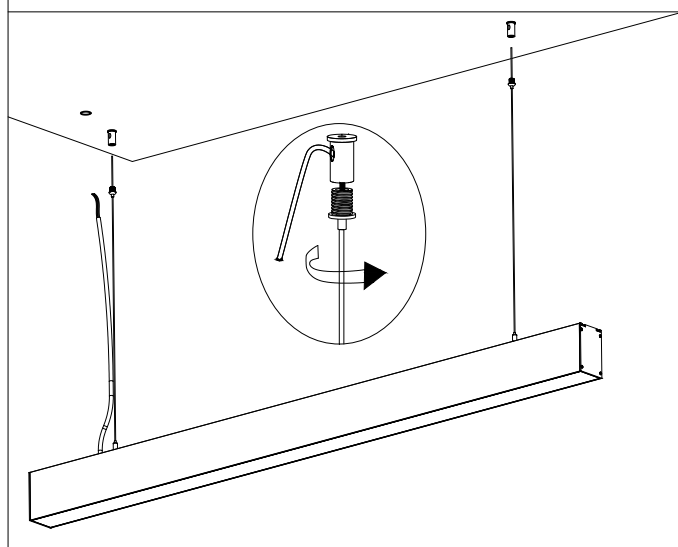


- 5、Connect the municipal power supply to the AC input terminal of the luminaire to finish the installation.

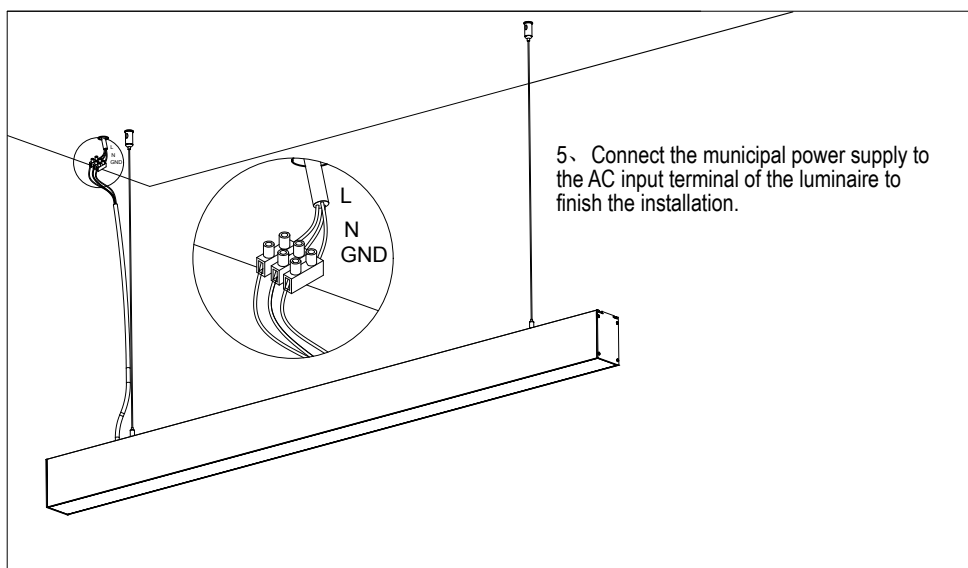


Packing


① Pack into PE bag

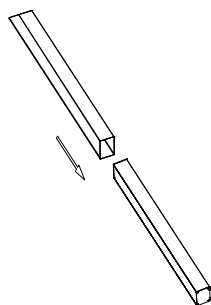

② Put into inner box

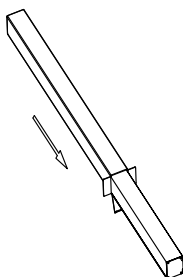

③ Pack into outer carton

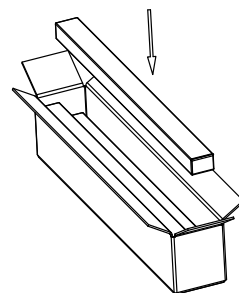

Model	HL-UA046-L12	Carton box	1260*210*210mm
Inner box	1230*60*90mm	QTY/Carton	6 PCS

Notices

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3..Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 4.DO NOT install fixture on unstable, loose or easily breakable surface.
- 5.DO NOT exert force on the surface of the fixture.