

Model : HL-R20Q480/5W/4


COB LED STRIP



Product Features

1. No spot, no shadow, soft light.
2. The largest emitting angle can reach to 180°
3. The antistatic grade (MIL - STD - 883 - e) : HBM level 2 (2000 ~ 4000 v)
4. Can be cut, and be free to cut off and weld along with the above cutting line.

Structure & Parameter


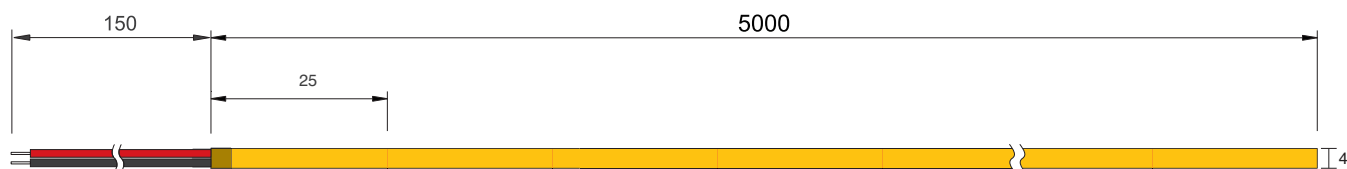


Parameter

Model No.	HL-R20Q480/5W/4	LEDs /m	480LEDs
Input voltage	12V	Working hour	50000h
Power	5W	Working temperture	-25℃~+45℃
CRI(Ra)	>90	Cuttable length(mm)	25
Beam angle	180°	PCB Width(mm)	4


CCT	2700K ±100K	3000K ±150K	4000K ±250K	6500K ±300K
Lumen/m	480LM	519LM	575LM	560LM

Cautions

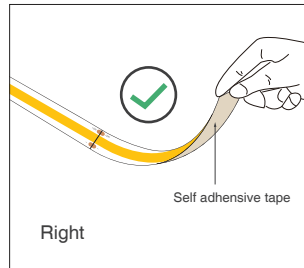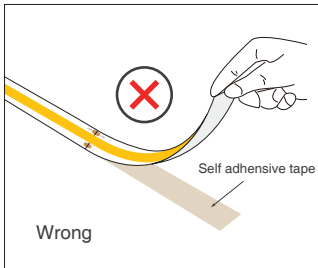


If the led strip needs to be torn up, please make sure that the self adhesive tape is torn with the led strip, otherwise the led strip will be damaged

When install the led strip, please note the installation technique. The led strip can be bent, but not distorted, as shown below.

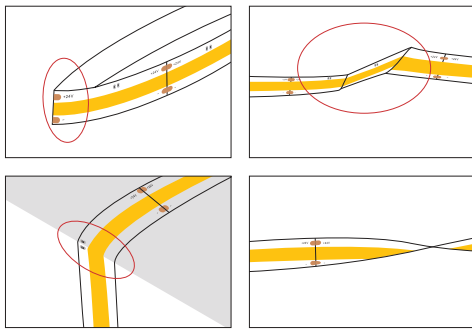

Distortion (Wrong)

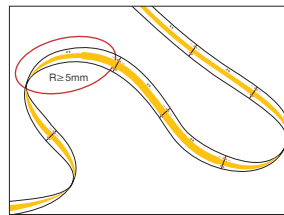


Bend (Right)

➤ LED strips are low voltage products, you must use the power supply (transformer). Please don't connect the led strip directly to the AC 110v or AC 220v, otherwise it will burn out the LED strips.

➤ Clean up the installation surface, it will ensure the reliability of the adhesive. The electrical connection process must be operated by a professional person.

Package

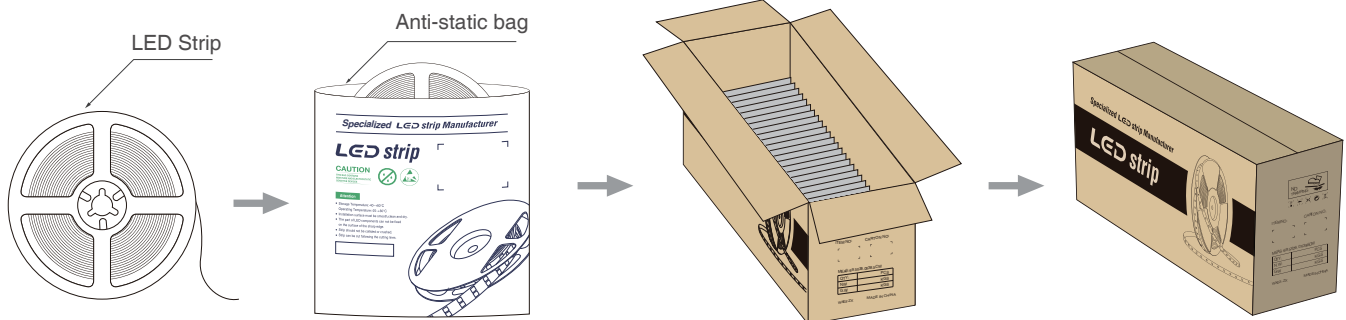

H E L I A N

**Specialized
LED strip
Manufacturer**

Shenzhen Helian Electronics Co.,Ltd



3F, Tonggao building 2, Sanlian industrial area, Songbai Rd, Shiyan Town, Bao'an District, Shenzhen, Guangdong, China



OUR EMAIL

admin@hlled.com



OUR PHONE

(86)-755-27606785



OUR WEBSITE

www.hlled.com