


Model : HL-R20Q512V/XW/10/24V


COB LED STRIP

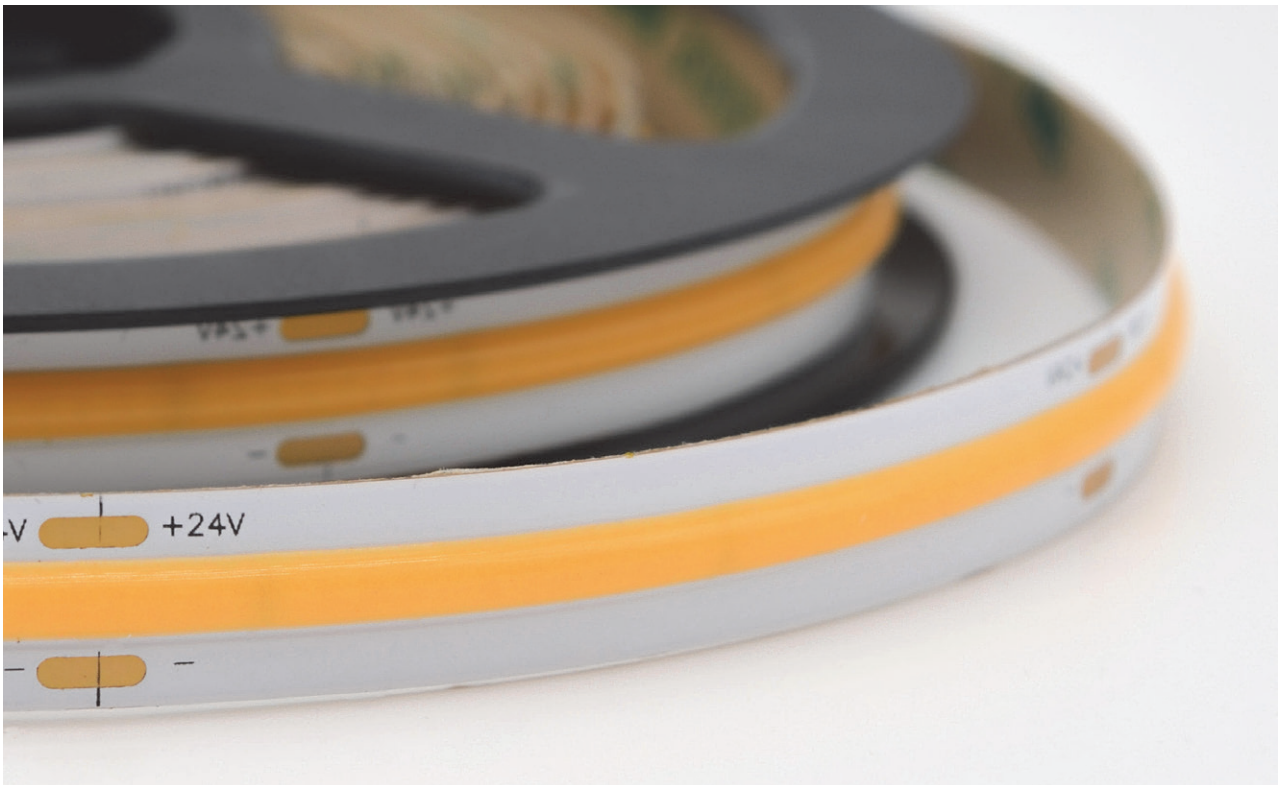

Product Features

1. No spot, no shadow, soft light.
2. The largest emitting angle can reach to 180°.
3. The antistatic grade (MIL - STD - 883 - e) : HBM level 2 (2000 ~ 4000 v).
4. Can be cut, and be free to cut off and weld along with the above cutting line.

Structure & Parameter

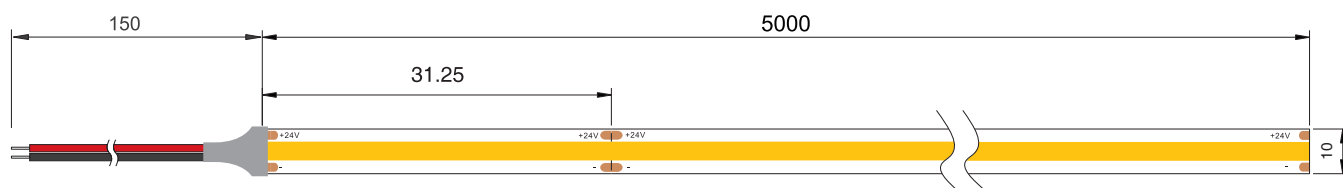


PARAMETER

Model No.	HL-R20Q512/XW/10	LEDs /m	512LEDs
Input voltage	24V	SMD Type	COB
Power/m	5W/10W/15W	Working hour	50000h
Max current / LED	26mA	Working temperature	-25 ℃~+45℃
CRI(Ra)	>90	Cutable length	31.25mm
Beam angle	180°	PCB Width	10


Power	CCT	2700K	3000K	4000K	6500K
5W	Lumen/m	≥481.9LM	≥519LM	≥575LM	≥560.7LM
10W	Lumen/m	≥1000LM	≥1029LM	≥1250LM	≥1200LM
15W	Lumen/m	≥1512LM	≥1527LM	≥1803LM	≥1783LM

Cautions

When install the led strip,please note the installation technique.The led strip can be bent,but not distorted,as shown below.

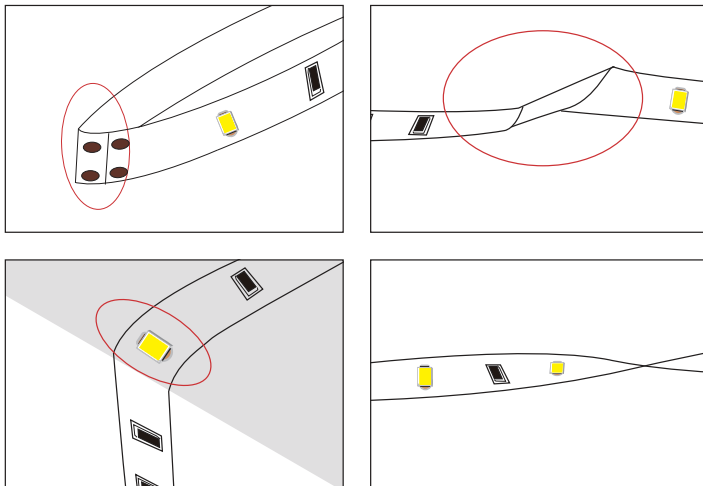


Distortion(Wrong)

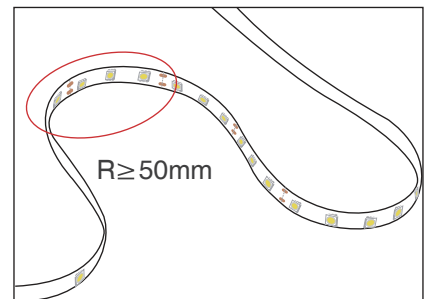

Bend(Right)

- LED strips are low votage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.
- Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

Package

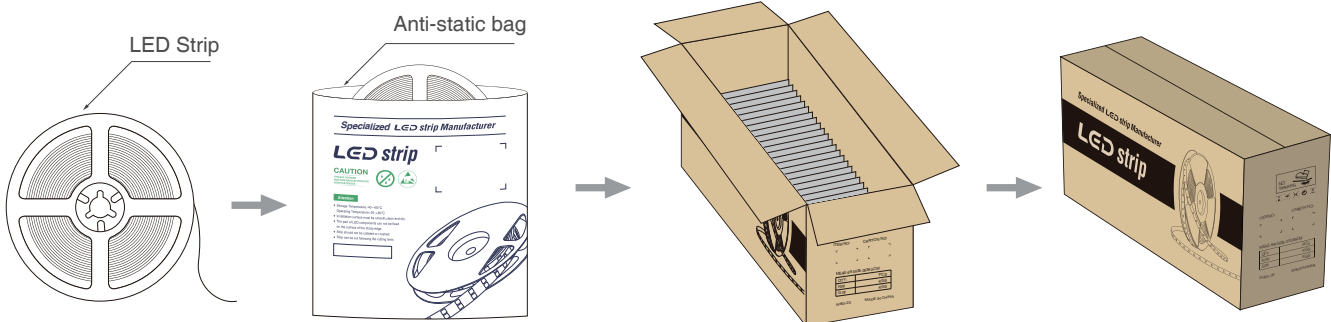

H E L I A N

**Specialized
LED strip
Manufacturer**

Shenzhen Helian Electronics Co.,Ltd



3F, Tonggao building 2, Sanlian industrial area, Songbai Rd, Shiyan Town, Bao'an District, Shenzhen, Guangdong, China



OUR EMAIL

admin@hlled.com



OUR PHONE

(86)-755-27606785



OUR WEBSITE

www.hlled.com