

Model : HL-R20Q512/XW/8


COB LED STRIP



Product Features

1. No spot, no shadow, soft light.
2. The largest emitting angle can reach to 180°.
3. The antistatic grade (MIL - STD - 883 - e) : HBM level 2 (2000 ~ 4000 v).
4. Can be cut, and be free to cut off and weld along with the above cutting line.

Structure & Parameter

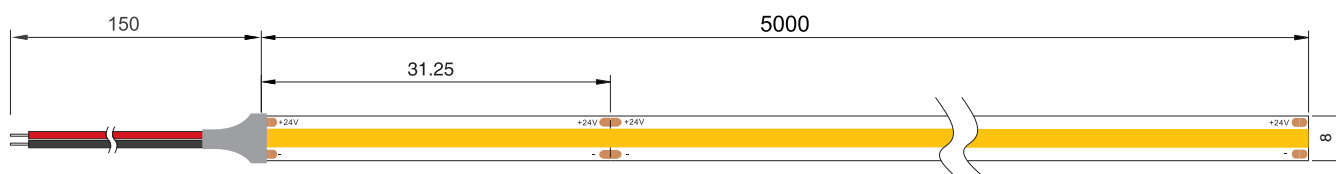

PARAMETER


Model No.	HL-R20Q512/XW/8
Input voltage	24V
Power/m	5W/10W/15W
Max current / LED	26mA
CRI(Ra)	>90
Beam angle	180°

LEDs /m	512LEDs
SMD Type	COB
Working hour	50000h
Working temperature	-25 °C ~ +45°C
Cutable length	31.25mm
PCB Width	8


Power	CCT	2700K	3000K	4000K	6500K
5W	Lumen/m	≥480LM	≥519LM	≥575LM	≥560LM
10W	Lumen/m	≥1000LM	≥1029LM	≥1250LM	≥1200LM
15W	Lumen/m	≥1512LM	≥1527LM	≥1803LM	≥1783LM

Cautions

When install the led strip,please note the installation technique.The led strip can be bent,but not distorted,as shown below.

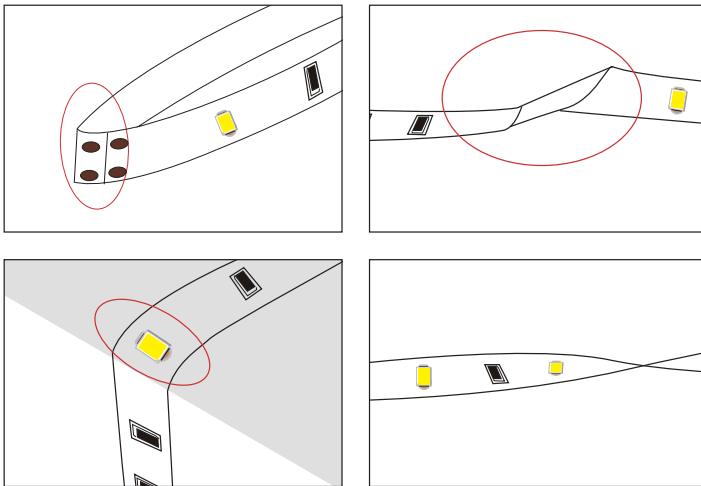

Distortion(Wrong)

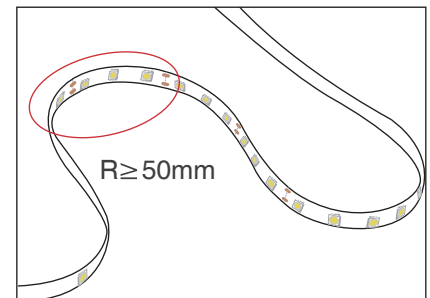


Bend(Right)

➤ LED strips are low votage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

➤ Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

Package

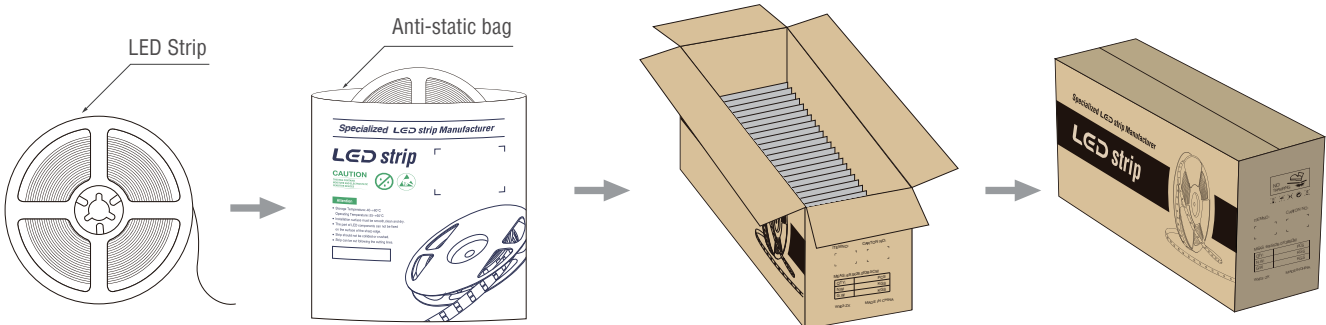

H E L I A N

**Specialized
LED strip
Manufacturer**

Shenzhen Helian Electronics Co.,Ltd



3F, Tonggao building 2, Sanlian industrial area, Songbai Rd, Shiyan Town, Bao'an District, Shenzhen, Guangdong, China



OUR EMAIL

admin@hlled.com



OUR PHONE

(86)-755-27606785



OUR WEBSITE

www.hlled.com