


HL-B2830

-Professional industrial design with sharp lines.
-It comes with adjustable light angles and multiple cover options,catering to requirements ranging from narrow-angle spot lighting to wide-angle flood lighting.



I Basic Parameters

Material	AL6063+PMMA
Surface	Anodized/Painting
Lighting source width	10mm
Length	3m/max
Application	For offices / conference rooms / supermarkets / home lighting application.



I Installation Accessories



Aluminum Profile




End Cap




Suspended Rope

• Optional cover

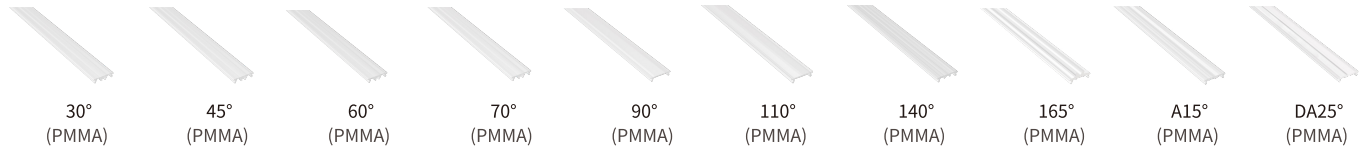

Model	Cover Model	Cover		End Cap	Clip	Suspended Rope (Set)	Connector	Lighting Source (width)
		PC	PMMA					
HL-B2830	HL-B2830	/	30° 45° 60° 70° 90° 110° 140° 165° A15° DA25°	Aluminum	/	✓	/	max 10mm

I Structure image

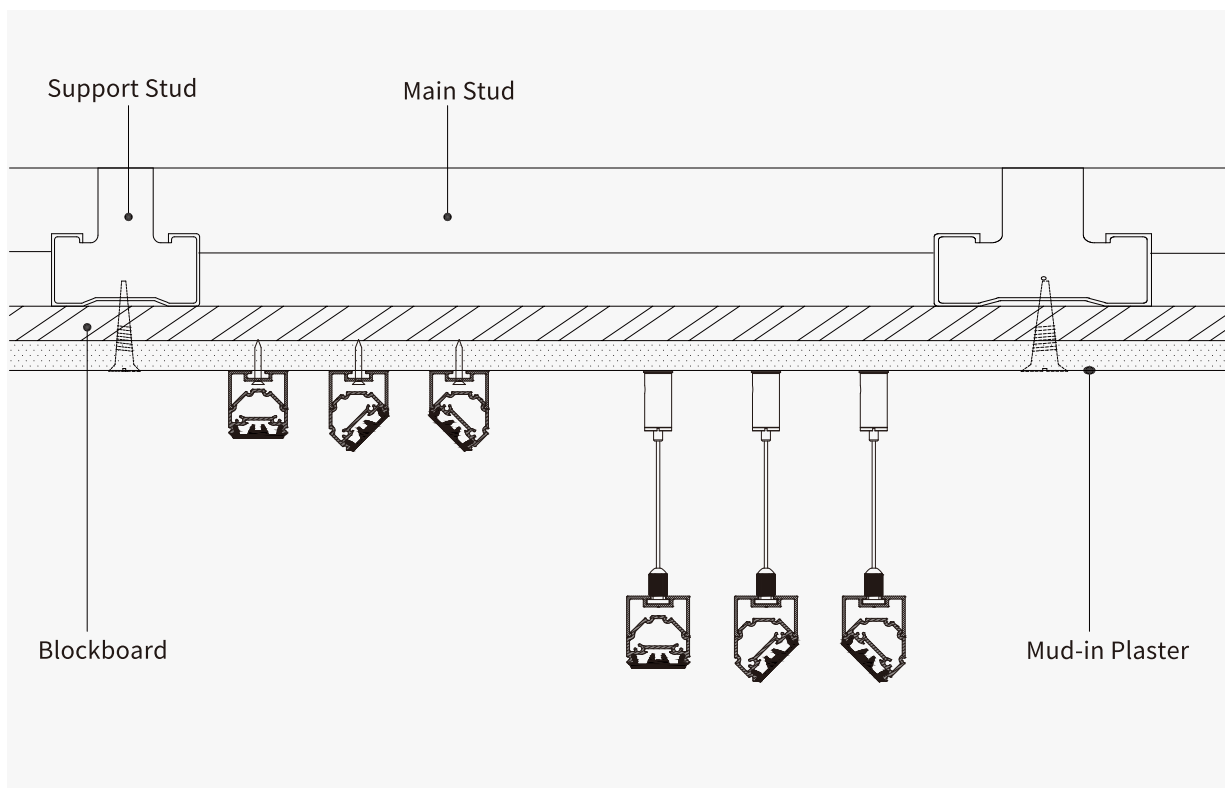

I Application

